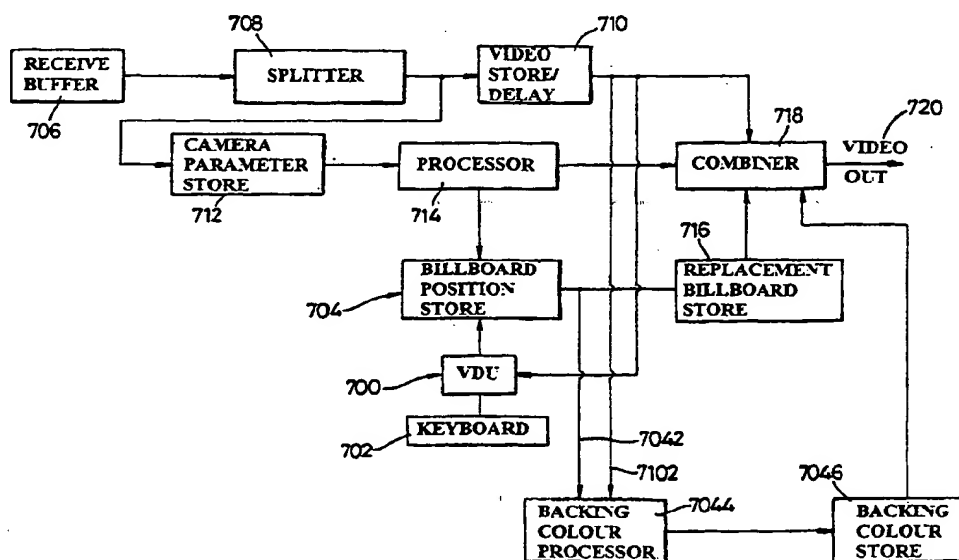




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 5/272, 9/15, 5/262		A1	(11) International Publication Number: WO 97/09822
			(43) International Publication Date: 13 March 1997 (13.03.97)
(21) International Application Number: PCT/GB96/02224 (22) International Filing Date: 9 September 1996 (09.09.96) (30) Priority Data: 9518439.6 8 September 1995 (08.09.95) GB 9601101.0 19 January 1996 (19.01.96) GB (71) Applicant (for all designated States except US): ORAD HI-TEC SYSTEMS LIMITED [IL/IL]; 14 Hata'as Street, Savir CTR, P.O. Box 2177, 44425 Kfar Saba (IL). (71) Applicant (for KG KZ RU SI SK UZ only): GOODMAN, Christopher [GB/GB]; 22 Village Close, Edwalton, Nottingham NG12 4AD (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): WILF, Itzhak [IL/IL]; 263 Ben-Gurion Road, 47212 Ramat-Gan (IL). SHARIR, Avi [IL/IL]; 21 Ani Maamin Street, 67727 Ramat Hasharon (IL). TAMIR, Michael [IL/IL]; 13 Beit-Tsuri Street, 69122 Tel-Aviv (IL). (74) Agent: GILDING, Martin; Eric Potter Clarkson, St. Mary's Court, St. Mary's Gate, Nottingham NG1 1LE (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: METHOD AND APPARATUS FOR AUTOMATIC ELECTRONIC REPLACEMENT OF BILLBOARDS IN A VIDEO IMAGE



(57) Abstract

Apparatus for automatic electronic replacement of a billboard in a video image including a video camera for viewing the billboard in which the billboard comprises a specific chroma-key area and in which the apparatus comprises means to recognise the specific chroma-key area in a stadium and to replace the billboard electronically.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**METHOD AND APPARATUS FOR AUTOMATIC ELECTRONIC
REPLACEMENT OF BILLBOARDS IN A VIDEO IMAGE**

5 The present invention relates to a method and apparatus for
automatically replacing billboards in a video image.

10 The present invention has particular use in electronic replacement
of billboards in a stadium or other venue but can be used to provide
accurate data relating to camera orientation for other purposes.

15 In previous systems it has been proposed to electronically replace
billboards in a stadium which are viewed by a viewer on television. The
billboards in the stadium are televised by a TV camera and the boards are
electronically altered so that the TV viewer at home sees a different board
to the spectator in the stadium or other venue.

20 The known systems such as those described in US 5,266,933, an
apparatus and method for electronically altering video images is disclosed.
The apparatus and method disclosed in the US patent and also in US
patent 5,353,392 whilst theoretically allowing replacement of billboards
do not solve the many practical problems encountered in real
environments. Most of these problems are related to the recognition and
replacement processes.

25 Relying entirely on pattern recognition techniques which utilize only
the video signal to identify and localise billboards for replacement
introduces major problems which affect the practical value of such a
system.

30 Clearly, any pattern recognition scheme, including those described

in US 5,264,933 and US 5,353,392 must rely on useful visible features in the image that can be compared with pre-defined descriptions. Such features should be located inside the billboard or at its neighbourhood.

5 In realistic situations, the visibility of these features might change, continuously or otherwise from practically zero to a some threshold visibility which allows the pattern recognition scheme to work properly. These changes can occur in the direction of growing or reducing visibility.

10 Such situations include :

- Acceleration or de-acceleration of camera motion introducing a huge amount of blur.
- Excessive zooming-in or zooming-out of the billboard.
- Excessive occlusion by players.
- 15 • Entering or exiting a camera's field of view by any combination of pan, tilt and zoom operations.
- Any combination of the above mentioned mechanisms.

20 Therefore, in practical situations, a continuous replacement of billboards, is not possible. Even if an interrupted replacement was allowed, it would require a delay of at least a few seconds to decide whether the resulting replacement interval is acceptable or not. Such a delay is usually not permitted in live broadcasting of sports events.

25 Replacing arbitrary billboards introduces further problems. A seamless replacement requires to identify the foreground objects occluding the billboard in order to inhibit replacement at places of occlusion. Foreground objects mainly consist of players but also the ball or other objects. Consider now a player with a red shirt, occluding a part of a
30 similarly red portion of a billboard. Colour contrast cannot be used

robustly to identify occlusion. Furthermore, since the player is a non-rigid object, motion or shape information cannot be used accurately enough to guarantee perfect replacement.

- 5 Another problem which may arise in practical situation is resolution of billboard identity. Consider two identical billboards positioned at two different locations in the arena. Suppose different replacement billboards are assigned to each of these physical billboards, then one must be able to tell which one is which. This can prove to be extremely difficult
10 especially if no unambiguous features are visible.

This invention describes a robust system for billboard replacement, based on some or all of the following key-elements:

- 15 • Physical billboards which are coloured properly to enable the efficient detection of occlusion by chroma-key techniques.
- Colour variation or a pattern within the physical billboard for further enhancing the performance of the image
20 processing methods.
- Pan, tilt, zoom and focus sensors attached to the camera, which enable after a proper set up procedure to estimate the presence and location of billboards in any given video field.
- Image processing methods and their embodiment which
25 enable to refine the sensors' estimates.

- The present invention therefore has for a first object to provide a physical billboard which comprises a chroma-key surface and also provides means for enabling an electronic replacement billboard to be
30 substituted for the chroma-key board.

The present invention therefore provides apparatus for automatic replacement of a billboard in a video image including a video camera for viewing the billboard, characterised in that the billboard comprises a chroma key surface and that the apparatus further includes a chroma-key unit operative to detect at least one chroma-key colour and in which the chroma-key colour is adjustable to conform to the colour of the chroma-key surface.

The present invention also provides a method and apparatus which enables identification of the location of a billboard or other static object in a stadium or other venue in any weather conditions with any panning speed of the camera and with any other change in camera parameters.

The present invention therefore provides apparatus for automatic electronic replacement of a billboard in a video image including an automatic camera orientation measurement apparatus including motion measurement means operative to measure the Field of View (FOV) of the TV camera relative to a known reference position.

The present invention also preferably provides apparatus for automatic electronic replacement of a billboard in a video image, including image processing means for processing video signals generated by the TV camera, in which said processing means includes calibration means for periodically automatically calibrating the motion measurement means, apparatus in which the motion measurement means includes means for measuring the pan tilt, zoom or focus of the camera relative to known reference positions and apparatus in which the motion measurement means includes means for measuring the pan tilt, zoom and focus of the camera relative to known reference positions.

The present invention therefore uses dynamic recalibration to correct for residual sensor errors or aberrations in an imperfect model and for sensor drift over time. Thus it is possible in accordance with the present invention to use less stable sensors and the apparatus and method
5 in accordance with the present invention can accommodate movement in the camera position. The image correction process for calibration of the sensors eliminates the necessity to keep the sensors stable by mechanical means by recalibration automatically with reference to the video image.

10 In the initial set up procedure corrections can be incorporated for calibration for billboards which are, for example, not in the centre of the Field of View - for example a billboard which is in the top left-hand corner of the screen can be adjusted by, for example, 3 pixels to take into account aberrations in the camera.

15 Problems which arise in the prior art systems are firstly when the billboard is either substantially totally occluded or secondly, is occluded by an object, such as a player, of the same colour as the real sign on the billboard.

20 This can firstly, as explained above, lead to non-recognition of the billboard and also secondly, to difficulty in satisfactory replacement of the billboard.

25 In the first case the real billboard can have already been replaced in the video image but if the camera zooms into a close up or if a different camera is used for the close up then the lock may be lost due to only a very small portion of the billboard being in view. In the second case the player may have on a strip which is the same colour as the billboard. The
30 prior art systems propose to distinguish the billboard from the player on

the basis of movement if the colours are the same and to analyse the "moving" pixels to determine occlusion. This is reasonable in theory but fails in practice since not all players are moving at all times. Thus, if a number of players move in front of a billboard and one player remains
5 after the others have moved on, the electronics will not be able to distinguish on movement grounds. Since colours are distorted by floodlighting, shadows, differences in reflectivity and different lighting conditions for a foreground player and a background billboard, there will be occasions in practice where the system fails. In such cases either the
10 original billboard may re-appear on the video image or the replacement billboard will not be accurately occluded.

It is again possible to introduce a delay in the video transmission to enable the electronic signal processing to be more accurate but this does
15 not solve the practical problem where a plurality of players move in different directions to occlude a billboard. The necessary delay is considered unacceptable and will in any case not solve all of the above problems.

20 In accordance with a preferred embodiment of the present invention it is proposed to replace the real billboards with chroma-key panels or with delineated areas forming chroma-key panels.

Chroma-key is essentially an occlusion technique allowing, for
25 example, a news reader to stand and move about in front of a chroma-key board, usually coloured blue or another suitable colour. The news reader (foreground) is distinguished from the chroma-key board (background) by colour differentiation and can thus move in front of the replacement background with normal occlusion of the foreground and background.

30 This technique is very well known in television studio systems and is

described in numerous US patents, including US 2,974,190 and 4,200,980.

In the present invention the billboards are replaced by chroma-key
5 panels or with delineated areas forming chroma-key panels.

In the prior art however only one chroma-key area is identified and this area is accurately lit. In the present invention several billboards may be situated at various locations within a stadium and the present invention
10 enables electronic billboards to be substituted for the several billboards.

Also in a virtual set studio application, the camera is typically 2-10 metres away from the foreground and the entire field of view is usually replaced. In comparison, a billboard may be several hundred metres from
15 the camera and therefore a replacement system using sensors is much more susceptible to sensor errors:

- Due to the large focal distances, the same sensor accuracy will translate to larger geometric registration errors.
20 Consider a rotary encoder of 81000 pluses/revolution, then the angular precision is 0.0044 degrees or 75 micro-radians. The repeatability is twice as bad. Consider a shooting range of 100 m with a field of view of 4 metres, then the FOV is 40 milli-radian. The error translates to $768 * 150 / 20000$
25 = 2.88 pixels.
- Since the field of view includes many stationary objects (including billboards) which are not replaced, the human observer will be much more sensitive to the registration errors. Additional errors may originate from lens distortion,
30 rotation axis which does not pass through the focal point,

non-zero roll angle, etc.

Chroma-key is basically a technique for studios where the illumination is carefully designed and controlled and the controls of the chroma-keyer are carefully adjusted for the specific arrangement of blue-screen colour and illumination.

In a sports event, the conditions may be highly non-ideal and require some modification to the chroma-key algorithms. In particular, the keyer parameters should be adapted to the specific billboards being replaced due to changes in illumination across the arena.

Accordingly in the present invention it is proposed to use chroma-key panels and to replace these in the video image by the replacement billboards.

Since it is necessary for perfect occlusion that the players or other occluding objects are of different colour to the chroma-key panels, it is proposed in a further preferred embodiment to provide chroma-key panels in which the colour of the panel may be changed, for example, by using a rotating billboard structure which is known in the art. One side could, for example, be blue and another green. Green may be preferable in a sports environment since players tend not to wear green as this would not contrast with the background sports surface.

25

In a further preferred embodiment and in particular where a plurality of billboards require replacement, a patterned chroma-key board is used. The pattern may be of any suitable shape but is preferably selected to be suitable for the size and shape of the billboard or series of billboards and also to the anticipated video conditions. Thus if a billboard

is only able to be viewed from a long distance then a different pattern will be selected to a billboard which is to be viewed in close up.

5 The pattern may comprise different colours or may be different shades of the same colour. The pattern may comprise vertical and horizontal lines or may comprise a decorative pattern, a discernible advertisement, company logo or other suitable wording which may be more aesthetically acceptable.

10 The use of a pattern allows further discrimination of the position of the camera and may allow movement of the camera from a fixed position.

15 The camera orientation data can be transmitted together with the video signal and will identify the position of the billboard in any weather, lighting or occlusion conditions. No reference is required to any feature within the sports venue to identify the position of the billboard.

20 The camera sensors can be accurate to a few pixels or in physical terms to approximately 1 cm at a range of about 100 metres thereby enabling accurate replacement of any billboard. The recalibration can be carried out continuously or only periodically, particularly if an initial adjustment of the calibration of billboards not in the centre of the FOV is recorded on set up.

25 By use of the chroma-key techniques there is no requirement to transmit any occlusion data since this can be readily inserted at a receiver and the occlusion inserted in the normal manner.

30 However when situated in different locations in the stadium, the boards, including those areas of chroma-key colour which are delineated

as chroma-key boards, hereinafter referred to as billboards, will be subject to varying and differing lighting conditions.

5 The problems which the inventors have realised is that a chroma-keyer will be set to detect a particular chroma-key colour and under different lighting conditions the colour of a billboard (as defined to include areas where billboards are to be inserted) will change. Thus the apparatus will be unable to accurately identify the various billboards situated around the stadium.

10

The present invention also therefore provides apparatus comprising a billboard map memory for recording the position of plurality of billboards and for recording the chroma-key colour of each billboard to be replaced to thereby provide a chroma-key colour map for a stadium.

15

A further problem which the inventors have realised is that if a plurality of different chroma-key colours are transmitted to a remote receiver to provide substituted billboards at a local distribution centre, then the chroma-key equipment at such a centre must also be equipped with selective chroma-key mapping. This substantially complicates the local receiving apparatus and it is an object of the present invention to overcome this problem.

20

The present invention therefore provides apparatus further including means for transmitting, for each billboard, to be replaced a perfect background colour key signal.

25

The present invention further provides apparatus further including means for transmitting the co-ordinates of each billboard to be substituted and apparatus further including receiving apparatus for reception of the

30

billboard coordinates and the perfect background chroma-key colour and including means for providing a combined video picture incorporating occlusion in the coordinate areas identified by the perfect background chroma-key colour.

5

In a preferred arrangement within a stadium or other sports venue real billboards with normal advertising material will be situated on one side of the stadium to be viewed by a first plurality of cameras and chroma-key billboards will be situated on another or the opposite side to be viewed by a second plurality of cameras. This, for example, the home nation may view the normal billboards, with the international TV audience seeing only substituted boards.

The present invention also provides a method for electronically replacing a billboard in a video image display, generated by a camera, comprising the steps of :

- a. identification of the position of a rectangular chroma-key colour billboard in a stadium or other venue, said identification step comprising specifying on the video display the chroma-key billboard to be replaced by identification of its four corners at a first camera position;
- b. storing the identification information;
- c. monitoring the movement of the camera in pan, tilt and zoom;
- d. storing the monitored movement of the camera on a field by field basis; and
- e. analysing the size and position of the chroma-key billboard to be replaced from the information recorded in its first known position and the stored movements of the camera to provide information relating to the size, perspective and

- position of the chroma-key billboard in the present video field;
- 5 f. storing in a billboard replacement store a replacement billboard to be used in replacement of the chroma-key billboard in the stadium;
- g. electronically altering the size and perspective of the replacement billboard in accordance with the camera motion information to conform to the size and perspective of the chroma-key billboard to be replaced in the present video frame; and
- 10 h. electronically replacing the chroma-key billboard in the present video frame by the replacement billboard.

In a preferred embodiment the step of analysing the size and position of the chroma-key billboard to be replaced comprises a further step of analysing a plurality of video scan lines to provide fine adjustment information relating to the exact size, perspective and position of the billboard to be replaced.

15

In a further preferred embodiment the chroma-key billboard to be replaced may be of a blue or green shade, due to the fact that these colours are rarely found in human skin and hair.

20

In a still further preferred embodiment the chroma-key billboard is patterned with a pattern of a suitable shape for the purpose of facilitating the fine adjustment process mentioned above. The step of analysis of the size and position of the billboard comprises the analysis of the pattern to ascertain the exact position of the billboard.

25

In a further embodiment the correction of the sensor-based

30

prediction by the analysis of the pattern will be controlled by a figure of merit (accuracy estimate) for the analysis, which will be computed automatically.

5 In a further embodiment the step of electronically replacing the billboard in the present video field by the replacement billboard include the step of superimposing occluding objects by use of the chroma-key techniques.

10 In a further preferred embodiment the billboard to be replaced can be changed to best match the colours and shades of colours on the players costumes, for the purpose of providing a good contrast between the billboards and the players. For example, if these costumes contain shades of blue, then a green billboard may be selected.

15 The backing colour can be selected between blue, green and red. In order for the chroma-keyer to calculate all parameters necessary to perform proper image compositing, the system requires a sample of the background colour as reference. This step can be done automatically by
20 scanning the image and detecting the purest and brightest colour. Advanced chroma-keyers enable the user to manually select the area to be sampled.

 In a further preferred embodiment the chroma-key apparatus will
25 have a multiplicity of set up conditions, each corresponding to a different region of the stadium. The camera pan, tilt and zoom information will allow to load the corresponding set up conditions.

 In a further embodiment, the fine adjustment information will be
30 used to compensate drift errors of the sensors. In a practical situations,

the sensor error will have a significant portion which is at temporal frequencies which are much lower than the video field rate. Thus these sensor-induced errors can be reliably estimated from good video field and subtracted from subsequent measurement.

5

The present invention also provides apparatus for carrying out the method of electronically replacing the billboard as specified hereinbefore.

Embodiments of the present invention will now be described, by way of example with reference to the accompanying drawings in which :-

Figure 1 shows a stadium or other venue illustrating the apparatus according to the present invention;

Figure 2 shows the video image of the stadium as seen by the camera in a first position;

Figure 3 illustrates a stadium with billboards in several different positions;

Figure 4 illustrates a zoomed camera shot of a billboard illustrating the problem with prior art systems;

Figure 5 shows a patterned chroma-key billboard for use with the present invention;

Figure 6 shows in block diagrammatic form circuitry associated with the camera arrangement of Figure 1 for transmitting video data and camera orientation data;

Figure 7 shows in block diagrammatic form receiver circuitry for co-operation with the transmitter circuitry of Figure 6;

Figure 8 shows a flow diagram for the operation of the circuitry of Figure 7;

Figure 9 shows an arrangement for a billboard setup data store;

Figure 10 shows an arrangement for billboard setup data;

Figure 11 shows a flow diagram for perspective transformation computation;

Figure 12 shows an arrangement for camera intrinsic parameters store;

5 Figure 13 shows equations for dynamic recalibration;

Figure 14 shows a flow diagram for dynamic recalibration;

Figure 15 shows the process of recalibration;

Figure 16 illustrates the problems relating to siting of billboards at different locations within a stadium with differing lighting conditions;

10 Figure 17 shows a graph of minimum and maximum levels for U & V illustrating the operation of a chroma-keyer;

Figure 18 shows a billboard with occluding object illustrating the principle of adjustment of the chroma-key colour for a billboard;

15 Figure 19 shows an exemplary remote receiver for reception of billboard coordinate data and perfect chroma-key colour, occlusion being effected by chroma-key techniques;

Figure 20 shows an alternative arrangement for the billboard set up data store illustrating an alternative embodiment;

20 Figure 21 shows a flow diagram for dynamic set up procedure for camera panning for use with the billboard set up data store of Figure 20; and

Figure 22 shows a flow diagram for dynamic set up procedure for camera tilting for use with the billboard set up data store of Figure 20.

25 With reference now to Figures 1 to 4 the principle of the present invention is now explained.

In a stadium or other venue 10 billboards 14,16,18 are installed at the side of a pitch represented by markings 12. These billboards are viewable by a camera 20. Billboards 15,17,19 may be present on the
30 opposite side of the stadium for viewing by a further camera 21. The

stadium terraces/seating are shown diagrammatically by the lines 11.

Camera 21 may in a preferred example be a normal TV video camera and will transmit its output video signal directly to a first feed
5 which may serve the local population. Although we refer to camera 20 or 21, it may be clearly understood that there could be a plurality of cameras on each side of the stadium providing differing views.

Camera 21 in a preferred embodiment will televise boards 15,17,19
10 which will be transmitted to the local population in an unchanged manner.

Camera 20 will in this preferred embodiment transmit a feed to an international audience. Camera 20 is equipped with orientation sensing means which preferably comprises one or more of the following :

- 15 pan measurement means 24;
 tilt measurement means 25;
 zoom measurement means 26; and
 focus measurement means 28.

20 Suitable sensors may comprise the Virtual Reality Encoder from RADAMEC EPO, Bridge Road, Chertsey, Surrey KT16, 8LJ, England.

Dependent on the allowed mobility of the camera only one, several or all of these may be required. For example, if camera 20 is fixed in
25 pan and tilt and focus and can only zoom, as in the case of some remotely controlled unmanned cameras then only the zoom parameter need be measured.

Most cameras in sports stadiums can zoom, tilt and pan and it is
30 assumed that these parameters are measured for each camera as now

explained. The focus is assumed to be fixed but in similar manner the parameter could be added if required.

Figure 2 shows the video image as seen by a viewer and in particular by the operator of the equipment. The camera 20 is zoomed, panned and/or tilted to "centre" the billboard 14 in a suitable position and at a reasonable size. With reference to Figure 7 each billboard is then viewed at a receiver and its position is marked preferably by using a touch screen 700, or keyboard mouse 702 and marking the four corners. The positions are stored in a store 704.

For billboards higher in the stadium such as 30 (Figure 3) a correction factor for the camera may be stored dependent on the tilt position of the camera.

Each billboard position is stored in store 704 together with the camera parameter information at the reference position for the camera 20 obtained from the camera parameter information which is correct at the time that the billboard position is stored.

The following procedure is preferably repeated for each of the cameras and for each of the target billboard :

1. Point the camera at the target to obtain a stable unoccluded view of the target. Adjust the zoom to get a large view of the target yet keeping the whole target within the field of view.
2. While the camera is not moving trigger an acquisition device, to grab a picture of the target, as well as the corresponding readings of the sensors.
3. Mark the corners of the target, on the video image.

Preferably a corner detector is used to pinpoint the corners of the target at sub-pixel precision.

5 This camera parameter information is obtained (Figure 6) from the sensors mounted on the camera and the camera movement is referenced to a first or fixed reference position for each parameter. The movements of the camera are sensed and the signals are fed into a combiner circuit 24 and then to a transmit buffer 36 from which the combined video and position data signals are transmitted.

10

During set up, at the receiver (Figure 7) the receive buffer 706 receives the signals and feeds these to a splitter 708. The video signal is stored and delayed in a suitable store 710 and the camera parameter data is extracted and stored in store 712.

15

In set up the VDU 700 is used to mark each billboard that may require replacement. The camera 20 is panned etc to move each billboard into a suitable position on the screen and its position is recorded in the billboard store 704 together with the camera parameters obtained from store 712 via processor 714.

20

A replacement billboard store 716 stores a plurality of replacement billboards and these are selectable to be able to replace the original billboard.

25

The replacement billboard is in operation inserted into the video signal in a combiner 718 to provide a modified output video signal 720.

The setting up procedure can also identify billboard locations and camera parameters for several cameras by storing a camera ID from a

30

source 30 (figure 6). Thus, billboard position store 704 will store separate lists of billboard data for each camera.

5 The operation of the system will now be described with reference to a single billboard and a single camera 20.

With reference to Figure 4, it is assumed that billboard 14 enters the field of view in an enlarged form on the left-hand side of the screen as camera 20 pans following zooming from the Figure 3 position.
10

The camera orientation data is constantly being received by the receiver and the processor 714 will constantly match on a pixel by pixel basis the video image with the known billboard position stored in store 704. As soon as the billboard appears in the video image the pixels
15 representing the billboard will be identified and the replacement billboard pixels which relate to those pixels will be substituted in the combiner 718. The delay will be minimal since the identification of the pixels is by an address correlation process which will be virtually instantaneous.

20 After a period of time the camera sensors may drift and in this case the replacement billboard may not exactly align with the original. This may only be by one or two pixels and may not be discernible to the viewer. To correct this two solutions are possible. Firstly, the billboard position can be manually restored periodically at a suitable time, for
25 example, when a camera is not active. This requires the co-operation of the operator.

Secondly, a comparison can be made on a pixel by pixel basis of the billboard against an original stored billboard and an adjustment of the
30 reference camera parameters can be made in billboard position store 704.

This process can be done automatically at either set intervals or when the processor 714 has a suitable time slot.

5 The essential steps of a preferred recalibration process are to
perspectively transform the current video image using the camera data to
provide an estimated transformed model. A stored image of the billboard
is then compared with the transformed model to provide a residual video
field. The residual distortion between the transformed model and the
10 residual video field is resolved to provide updating information for
updating the estimated transformation and to thereby provide a calibration
correction factor for recalibrating the position of each billboard in the
store in accordance with the camera sense information.

15 The replacement of each billboard is accomplished by use of the
processor 714 (Fig. 7) and the various parameter and billboard stores
using appropriate software programmes as now described in more detail.

Figure 8 describes the complete process which allows to determine
the position of each billboard in the camera's field of view, and render the
20 corresponding part of the billboard into the frame buffer. Since the
rendering and later the compositing of the graphics buffer with the video
buffer by means of chroma-key are known art, we will concentrate on the
billboard position determination with reference also to Figures 6 and 7.

25 At the beginning of each video field, the pan, tilt, zoom and focus
sensors (24,25,26) are read 800. These values, combined with billboard
data from billboard setup data store 704 and camera data from camera
intrinsic parameters store 712, enable the detection and recognition of all
billboards in the camera's FOV, independently of the video signal. The
30 processing of Fig. 1 consists of a loop on all billboards (m) 802,804. For

each billboard, its setup data is retrieved 806 from billboard setup data store 704 and used with camera intrinsic parameters 808 to compute the perspective transformation 810 from billboard m to current field. The replacement billboard information is then stored (812) in a frame buffer.

5

Fig. 9 describes the billboard setup data store 900 which consists of a separate record 902..904 for each billboard in the arena. Such a record consists of a static image 906 grabbed in favourable conditions and of the corresponding static setup data 908. The record also consist of
10 dynamic setup data 910 which is computed using the image processing means in a process known as dynamic re-calibration which has been briefly described above and will be further described with reference to Figure 11. An alternative procedure providing static and dynamic calibration is described with reference to Figures 20, 21 and 22.

15

Fig. 10 describes the setup data (either static or dynamic) 1000 for a single billboard. It consists of the sensors' readings 1002 at the setup instance, the billboard quadrilateral vertex 1004 coordinates and the time-code of the setup instance 1006.

20

The method of dynamic re-calibration can be explained as follows:

Due to sensors' drift and inaccuracies, a final calibration table and other practical reasons, it is impossible to predict the exact location of all
25 visible billboards at a given instance. However, at many video fields, a billboard's visibility may be such that an exact geometric position correction can be performed. Since that position is closer both temporally and spatially to the subsequent video fields, it is preferable to rely on that "luck shot" by predicting the billboard position relative to its sensors'
30 readings and exact quad coordinates. Consider for example a billboard

which exits the field of view due to camera panning. Having a luck shot while it is still highly visible, allows the smooth tracking of the billboard by sensors only, when its visibility does not allow any image processing means to be applied.

5

Fig. 11 depicts the flow diagram 1100 for perspective transformation computation. A setup data selection logic 1102 selects either the static 1103 or the dynamic 1105 setup data from the setup data store 806 as described above. This setup data, together with camera
10 intrinsic parameter is used to compute a sensor-based prediction of the perspective transformation 1104, independently of the video signal.

A dynamic re-calibration 1106 based on image processing means is then applied to the prediction. It utilizes the video 1108 and chroma-key 1110 signals as well as the billboards model image 1112 from the
15 setup data store 806 (Fig. 8). Based on a quality factor derived from the image processing means, either the sensors-based 1118 or the corrected transformation 1116 are output. If the estimated quality of the geometric correction is high, then the dynamic setup data is updated 1114.

20

Figs. 12,13,14 describe the sensor-based prediction of billboard coordinates in the video field. Such a prediction utilizes the sensors reading as well as the camera intrinsic parameters. These parameters are described in Fig. 12 and have to be tabulated for a dense sampling of the
25 (zoom,focus) space. The meaning of these parameters is clear from Figure 13 to which reference is now made.

Let the set of measurements given by the pan, tilt, zoom and focus sensors be represented by the vector (P,T,Z,F). The tilt angle is assumed to be relative to the horizon.

30

Consider an object point whose image at some setup instance is, at frame-buffer coordinates (x_s, y_s) . Let also the sensor measurement vector at that instance be (P_s, T_s, Z_s, F_s) .

5 At another instance, the prediction instance, let the sensor measurements vector be (P_p, T_p, Z_p, F_p) . It is required to predict the location of the object point in frame-buffer coordinates (possibly out of the actual frame-buffer), (x_p, y_p) .

10 To enable the procedure we define the setup rotation matrix as shown at 600 and the prediction rotation matrix is defined as shown at 602.

15 Then, the perspective transformation matrix between the two image-plane coordinate systems is given as shown at 604 and 1402 (Fig. 14).

20 R_{sp} is a 3*3 matrix with row and column indices ranging from 0 to 2. $R_{sp}[i][j]$ denotes the term in row i , column j in the matrix. Thus, given the setup image-plane coordinates of the object point (u_s, v_s) , the predicted location of the object point in image-plane coordinates (u_p, v_p) is given as shown at 606, 1404.

25 Image-plane to frame-buffer coordinate transformation is achieved as shown at 608, 1406. Aberration compensation is achieved as shown at 608, 1406 (Fig. 14) to provide predicted frame buffer billboard coordinates and perspective transformation data.

30 An effective way of deriving these parameters for a specific (zoom, focus) pair is described in [J. Weng et al., Calibration of stereo cameras using a non-linear distortion model, IEEE 10th Intl. Conf. Pattern

Recognition (1990), pp. 246-253]. The image processing means for geometric correction, which allow also the process of re-calibration, is now described with reference to Fig. 15.

- 5 The image processing means for geometric correction of sensors-based prediction are based on the differential method for motion estimation [C. Cafforio and F. Roca, The differential method for motion estimation, in: T.S. Huang, ed., Image sequence processing and dynamic scene analysis, Springer, Berlin, 1983, pp. 104-124]. Let C be the current video
- 10 field and let M be the static billboard setup image, perspectively transformed according to the sensors-based prediction. Here we consider only luminance images. Ideally, M and C are identical within the support of the billboard quadrilateral. Actual differences may include:
- Occlusion present in C but not in M.
 - 15 • Geometric errors due to sensors and intrinsic camera parameters errors.
 - Luminance changes.

Neglecting for the moment any difference which is not due to

20 geometric errors, consider a point (x,y) inside the support of the billboard quadrilateral. Let (p,q) be the local geometric error then we may write for the luminance signals of the respective images:

$$M(x + p, y + q) = C(x, y)$$

Under the assumption that the error is small, one may write a

25 Tailor series expansion:

$$M(x + p, y + q) = M(x, y) + p \frac{dM}{dx} + q \frac{dM}{dy} + (\text{Second order terms})$$

Neglecting the second order terms and denoting the spatial derivatives

$$dM/dx = H$$

$$dM/dy = V$$

we obtain

$$C(x,y) - M(x,y) = pH + qV$$

5

Also denoting the differences $C(x,y) - M(x,y)$ by D we obtain

$$D = pH + qV$$

The equation above holds, locally. For a global billboard solution,
 10 and small error assumption we may use the perspective model [G. Adiv,
 Determining Three-Dimensional Motion and Structure from Optical Flow
 Generated by several moving objects, IEEE Trans. Pattern Analysis and
 Machine intelligence, 7, pp. 384 - 401, 1985].

15

$$p(x,y) = \frac{a_1x + a_2y + a_3}{a_7x + a_8y + 1}$$

$$q(x,y) = \frac{a_4x + a_5y + a_6}{a_7x + a_8y + 1}$$

20

The coefficients a_1, \dots, a_8 are computed by minimizing the following
 expression:

$$\sum_{(x,y)} (D(x,y) - p(x,y)H(x,y) - q(x,y)V(x,y))^2$$

25

Now, the perspective transformation matrix (based on sensors'
 prediction) is multiplied by:

$$\begin{bmatrix} a_1 & a_4 & a_7 \\ a_2 & a_5 & a_8 \\ a_3 & a_6 & 1 \end{bmatrix}$$

5 The matrix obtained can be considered to be the updated prediction of billboard perspective.

In a practical environment the following considerations may apply.

- 10 • Occlusion may cause major problem in this formulation, since if pixels from occluding and moving objects participate in the minimization of the expression above they might bias the solution significantly. Preferably, such pixels are discarded from processing by using chroma-key panels. A key signal output by a chroma-keyer, is preferably utilized to discard these pixels.
- 15 • Luminance variations can be minimized by pre-processing the current video field, using histogram matching techniques.
- 20 • The prediction-correction process may require 2-3 iterations to converge.
- Noise immunity and convergence can both be enhanced by pre-smoothing the images.

Thus the billboards 14 etc are in accordance with the present invention chroma-key boards and occlusion is by colour discrimination using the normal chroma-key techniques. These techniques will enable
 25 perfect occlusion providing that the players do not wear any colour which is the same as the board. This may not always be possible and it is proposed in accordance with a particular embodiment of the present invention to use boards which can rotate or otherwise change to a second or third colour. For example, three colours may be blue, green and red
 30 which may be selected when the colour of the players strips are known.

Alternatively if it is required to display a billboard in an area of the pitch or a surrounding area then such an area must be selected to be of a known colour which can then be recorded in the chroma-keyer as a chroma-key colour.

5

In a preferred embodiment chroma-key apparatus can comprise the ULTIMATTE-7 digital video image compositing device from ULTIMATTE Corp., 20554 Plummer St., Chatsworth, CA 91311, USA.

- 10 The backing colour can be selected between blue, green and red. In order for the chroma-keyer to calculate all parameters necessary to perform proper image compositing, the system requires a sample of the background colour as reference. This step can be done automatically by scanning the image and detecting the purest and brightest colour.
- 15 Advanced chroma-keyers enable the user to manually select the area to be sampled.

- In a particular embodiment it is proposed to use a patterned chroma-key panel. Calibration of the camera sensors can then readily be
- 20 accomplished by comparison of the pattern on a pixel by pixel basis. The pattern on the billboard panel should preferably have critical dimensions less than anticipated sensors error (projected to world coordinates).

- In summary, the above system can operate even in extremely poor
- 25 weather conditions since the electronic processing circuitry knows exactly where each billboard is situated and does not rely on any analysis of the video image to detect the billboard. In the event that the video image is so distorted that recalibration cannot be carried out with reasonable certainty, then the original camera parameter settings can continue to be
- 30 used since the video image as viewed will be of poor quality and thus the

viewer will not notice an error of one or two pixels in the positioning of the replacement billboard which will require to be displayed in an equivalent quality which matches the poor quality video image.

5 In a further preferred embodiment of the present invention, the problem addressed is that of having billboards situated in different positions in a stadium as shown in Figure 16.

10 In such conditions the lighting of billboards, 1,3 and 5 will be different because of the location of lights 7, 9 and 13. Also this lighting can change all the time during the game.

15 If such billboards are chroma-key boards all of the same colour then the billboards will all appear to be slightly different colours due to the different lighting conditions.

 A fixed adjustment of a global backing colour might result in partial object background separation by the chroma-keyer.

20 In the present invention it is proposed to provide spatial adaptation of the backing colour map so that the chroma-keyer can correctly recognise each billboard. This can be provided by storing in store 704 (Figure 7) a spatial map providing information relating to the colour of each chroma key board.

25

 Thus, the chroma-keyer will compare the colour in each video location with a specific colour associated with the billboard in that location.

30 In a preferred embodiment the locations of the billboards may be

identified by "painting" a slightly enlarged box surrounding the billboard to identify the location. Such boxes are identified as 1', 3' and 5" by dotted lines in Figure 16.

- 5 The system will track the backing colours over time and therefore will continuously update, to ensure correct identification, once correctly set up.

The operation of the system is as follows.

10

Firstly with reference to Figure 17, minimum and maximum levels are set for U and V. These should be wide enough to encompass all billboards which are reasonably lit.

- 15 Then for each billboard, as lighting conditions change, an adjustment can be made to its stored values, as shown in Figure 18, which assumes occlusion of billboard 1 by an object 13. An inner box 1" is defined to ensure only pixels from within 1 are considered. Most occluding pixels can be discarded as these will be of a different colour.
- 20 Then all pixels (YuV) inside FOV and billboard quad 1" are measured and an addition to the average (which is backing colour average UV over billboard) is made if :-

$$\begin{array}{l}
 U_{\min} \leq U \leq U_{\max} \\
 \text{or} \quad V_{\min} \leq V \leq V_{\max}
 \end{array}$$

25

- The inventors have recognised a further problem which arises from the use of chroma-key billboards in a stadium. Due to the variable lighting as described above, each billboard will appear on the video image
- 30 as a slightly different colour. In order to transmit correct occlusion

information it is necessary to transmit an occlusion map for each billboard.

5 In accordance with a preferred embodiment of the present invention it is proposed to transmit, for each billboard, a perfect background colour and to then allow a chroma-keyer in each receiving station to introduce the occluded portions by normal chroma-key procedures.

10 Consider now the billboard arrangement as shown in Figure 16. Each billboard 1,3 and 5 will, because of its different lighting conditions, appear to be a different colour even though this colour may be within the maximum and minimum limits as set out in Figure 17.

15 In accordance with this preferred embodiment of the present invention, the transmitting apparatus (see Figure 6) will transmit a perfect chroma-key colour within the area of the billboard and will also transmit the coordinates of the quadrilateral formed by the billboard.

20 In this way the receiving station only has to decode/extract the quadrilateral coordinates of the billboard and then within that quadrilateral replace those pixels which are the perfect chroma-key colour by the replacement billboard. Those pixels which are not a perfect chroma-key colour are not replaced.

25 In accordance with this system it is not necessary for the chroma-keyer at the remote receiving station to be able to recognise different billboards and to have to store different chroma-key values for each billboard. Also it is not necessary to transmit any occlusion information since occlusion by the chroma-keyer will be relatively simple at each
30 remote location.

With reference to Figure 7, the billboard position and backing colour store 704 knows the position of each billboard and a control output 7042 from the store is used, in combination with the video output 7102 to provide inputs for a backing colour processor 7044 which can change the colour of the billboard within the coordinates provided by store 704. The output of processor 7044 is used to control a backing colour store 7046 which changes the colour of the billboard within the required coordinates and can also provide the coordinates to the video output 720 for the remote receiver. These may be transmitted by a standard video data transmission system.

An exemplary remote receiver is shown in Figure 19. Video data is received at receiver buffer 1900 and split and delayed 1902, 1904.

Billboard coordinate store 1906 stores the transmitted billboard coordinates and in combination with graphics generator 1908 and replacement billboard image store 1910 provides an output signal to a combiner/chroma-keyer 1912 to produce the desired, occluded billboard on the screen.

With reference now to Figures 20 to 22 in a further embodiment the set up data stored in store 704 is modified prior to any event being televised.

5 The modification comprises the addition of dynamic set up data as well as the static image and static set up data shown in Figure 9.

 The additional data may be used instead of the dynamic recalibration set up data 910 shown in Figure 9 or could be used in
10 addition.

 In a preferred embodiment it is assumed that the additional data is used instead of the dynamic recalibration procedure and this is now described.
15

 As an introduction, the problems associated with replacing billboards with virtual billboards are discussed. The same problem is identifying the position, size and perspective of the original billboard and then replacing this with the virtual or replacement billboard.
20

 In a static camera situation there is no real problem once the original co-ordinates have been recorded providing that the camera sensors do not drift substantially over time.

25 However, the inventors have found that during rapid panning or tilting of the camera the co-ordinates 908 of the replacement billboard as recorded in the store 900 do not coincide with the actual position of the billboard in the stadium or venue. This is because the camera sensors exhibit a degree of hysteresis. This can be compensated for by the
30 dynamic recalibration process already described but this may not be

practical in some circumstances such as during rapid panning with substantial occlusion of the target billboard.

5 The hysteresis could possibly be countered by a simple percentage error built into the movement of the camera but this does not produce very good results because it does not take into consideration the camera angle with respect to each billboard nor does it take into account the variability in the camera parameter sensors with angle.

10 In the present invention therefore in an alternative embodiment, in addition to static billboard set up data the billboard set up data store 900 stores data for each billboard for each camera at least in relation to left-right pan 2002, right-left pan 2004, up-down tilt 2008 and down-up tilt 2006. The data is obtained and stored as now herein described with
15 reference to Figures 20 to 22.

Figure 20 shows the store 900 modified to provide, in addition to the static image data for billboards 1 to M and the static set up data for billboards 1 to M four further sets of data for each billboard 1 to M and
20 these are multiplied to provide this data for each camera.

For each camera the position of each billboard is recorded with the camera panning from left to right 2002 and for right to left 2004. The panning speed may be selected as the normal speed for the event being
25 televised. Thus for example for horse racing it could be low but for motor racing it could be higher. The position of each billboard is then recorded with the camera tilting upwards 2006 and then downwards 2008 across each billboard.

30 For each measurement the camera zoom and focus are preferably

set at a known level at which the billboard being analysed is in a reasonable view at a reasonable size. The zoom and focus could for example be the same as that during the acquisition of the static set up data for each billboard so that a direct comparison with the static set up data
5 can be made. In that case only an error correction figure may need to be recorded.

It is preferable not to select too high a panning or tilting speed because at very high speeds the billboards will in any case be blurred and
10 therefore accuracy of replacement will not be an issue. This procedure is followed for each billboard for each camera and the data is then used during the event to correct the position of each billboard as the camera pans or tilts.

15 It may be seen that each billboard will be viewed at a different angle by each camera and also that the output of each of the sensors on each camera may vary dependent on the angle through which the camera must turn to view the billboard. By recording the static data and data relating to panning and tilting in both directions the replacement billboard
20 will be accurately positioned in the exact position of the original or real billboard both for static shots and when the camera is moving.

Dynamic recalibration during the event as previously described will ensure, except during very fast camera movements with large occlusion,
25 that the replacement billboard is correctly positioned but the use of static and dynamic set up data will also ensure this unless the camera sensors drift substantially during an event. Thus providing that the camera sensors are of a reasonable quality from the point of view of draft they can be of a variable quality with respect to accuracy during panning and tilting. By
30 careful selection of camera sensors extremely accurate sensors are

therefore not required since any variation with respect to camera movement is compensated for by the storage of dynamic set up data.

The data is obtained as described with reference to Figures 21 and
5 22 as follows.

Once the static data relating to each billboard image and its static set up data (906, 908, Figure 9) has been obtained, sequence 2100 is started and the camera is panned 2102 by the operator at a desired speed
10 relative to the normal panning speed.

The sensors indicate the direction of pan 2106 and dependent on the direction the dynamic data is stored in store 2002 or 2004 in steps 2106 or 2108 by selection of that store. The sequence for both L-R and R-L
15 stores 2002 and 2004 is similar and will be described for the L-R store but using reference numerals for both stores.

As the camera pans L-R each billboard is identified from data stored in store 906 step 2110; 2112. The system asks if the billboard has
20 previously been recoded dynamically step 2114, 2116 and if so it returns to the start of the sequence and repeats steps 2104-2110 until it finds a billboard that has not been dynamically scanned. Once a new billboard has been found the position (co-ordinates) of the billboard during panning is recorded and compared with the static billboard parameters previously
25 stored (908) in step 2118, 2120. Any error is computed (step 2122, 2124) and the errors are stored in L-R and R-L pan stores 2126, 2128 for the billboard. The system asks if all billboards recorded in store 908 have been dynamically scanned both for L-R and R-L (steps 2130, 2132). If not the sequence is continued until the last billboard has been dynamically
30 scanned and then the program is terminated 2134, 2136.

A similar program sequence shown in Figure 22 is provided for tilting of each camera. Obviously if the cameras are not either allowed to tilt or are unlikely to be tilted to any extent then this sequence and the recordal of data in stores 2006, 2008 may not be necessary.

5

The sequence is started 2200 and each camera in turn is tilted 2202 and the direction of tilt determined 2204 by the camera sensors. Dependent on whether the camera is tilting up or down dynamic set up data is stored in stores 2006 or 2008 in steps 2206, 2208. Both sequences
10 are similar and only the sequence tilting the camera down will be described with reference then to both sequences.

Each billboard is identified 2210, 2212 from the static image data and also from the camera parameters especially where all real billboards
15 are the same. The program interrogates the billboard data step 2214, 2216 to see if the billboard has already been interrogated. If it has the program restarts but if not the co-ordinate data of the billboard during tilting is compared with the static data step 2218, 2220. The error, if any is computed step 2122, 2124 and stored in the stores 2006, 2008 (Figure
20 20) step 2226, 2228.

The program then interrogates stores 2006, 2008 to see if all billboards have been dynamically interrogated for tilt errors in both up (step 2230) and down (step 2232) and if so ends the program steps 2234,
25 2236. If not the program continues by commencing at the start of the sequence until all boards have been interrogated.

Normally camera zoom and focus will not require the same type of dynamic set up data to be stored. However, if particular camera
30 aberrations are known then these may be compensated for by use of

similar dynamic set up data.

The dynamic data stored in stores 2002-2008 may be used instead of or in conjunction with the dynamic recalibration data obtained as described with reference to Figure 9. Usually however the dynamic set
5 up data will obviate the need for recalibration during most types of event.

During use the system knows by reading the camera sensors whether the billboard is being viewed in a static manner or is being
10 panned past L-R or R-L or tilted past UP or DOWN. In such cases the position of the billboard is taken from the static data store and then if panning or tilting is occurring, the necessary error corrections are applied. Once camera movement ceases the static billboard parameters are reverted
15 to.

CLAIMS

1. Apparatus for automatic replacement of a billboard in a video image including a video camera for viewing the billboard, characterised in that the billboard comprises a chroma key surface and that the apparatus
5 further includes a chroma-key unit operative to detect at least one chroma-key colour and in which the chroma-key colour is adjustable to conform to the colour of the chroma-key surface.
2. Apparatus as claimed in claim 1 in which the apparatus further
10 comprises a billboard map memory for recording the position of plurality of billboards and for recording the chroma-key colour of each billboard to be replaced to thereby provide a chroma-key colour map for a stadium.
3. Apparatus as claimed in claim 2 in which the apparatus further
15 comprises means for automatically adjusting the chroma-key colour map in accordance with variations in lighting conditions within the stadium.
4. Apparatus as claimed in any one of claims 1 to 3 in which the camera incorporates an automatic camera orientation measurement means
20 including motion measurement means operative to measure the Field of View (FOV) of the camera relative to a known reference position.
5. Apparatus as claimed in claim 4 including image processing means for processing video signals generated by the camera in which said image
25 processing means includes calibration means for periodically automatically calibrating the motion measurement means.
6. Apparatus as claimed in any one of claims 1 to 5 further including means for transmitting, for each billboard to be replaced, a perfect
30 background colour key signal.

7. Apparatus as claimed in claim 6 further including means for transmitting the co-ordinates of each billboard to be substituted.
8. Apparatus as claimed in claim 7 further including receiving
5 apparatus for reception of the billboard coordinates and the perfect background chroma-key colour and including means for providing a combined video picture incorporating occlusion in the coordinate areas identified by the perfect background chroma-key colour.
- 10 9. Apparatus as claimed in claim 2 further comprising a dynamic billboard memory for recording any changes in measured position of the billboard as the camera pans or tilts.
10. A method of automatic electronic replacement of billboards in a
15 video image comprising the steps of :
- i. identifying a first specific area in the video image, said specific area having a defined first chroma-key colour;
 - ii. recording the first colour of said first specific area in a chroma-key colour store;
 - 20 iii. identifying a first replacement billboard for substitution into said first specified area; and
 - iv. replacing by chroma-key techniques said first replacement billboard in said video image said replacement including the step of occluding those parts of the first specific area which are occluded in the
25 video image by an occluding object.
11. A method as claimed in claim 10 comprising the steps of :
- i. identifying further specific area in the video image, each further specific area having a related chroma-key colour;
 - 30 ii. recording the colour of all specific areas on a chroma-key

colour store together with information relating to the position of each of said specific areas;

iii. identifying replacement billboards for substitution into each of said specified areas; and

5 iv. replacing the substitute billboards into the correct respective locations with occlusion by occluding objects.

12. A method as claimed in claim 10 including the steps of :

10 updating the recorded chroma-key colours for each specific area at appropriate time intervals to compensate for lighting changes within a stadium.

13. A method as claimed in claim 11 or claim 12 further including the steps of :

15 i. transmitting together with video image information data identifying the specific area comprising location and size of each of a plurality of billboards;

 ii. transmitting for each specific area identified as a billboard a perfect chroma-key colour;

20 iii. receiving in a receiver the data identifying each of a plurality of billboards to be replaced and the perfect chroma-key colour information for said specific areas;

 iv. comparison of the perfect chroma key colour with a preselected matching perfect chroma-key colour in a chroma-key apparatus
25 in said receiver;

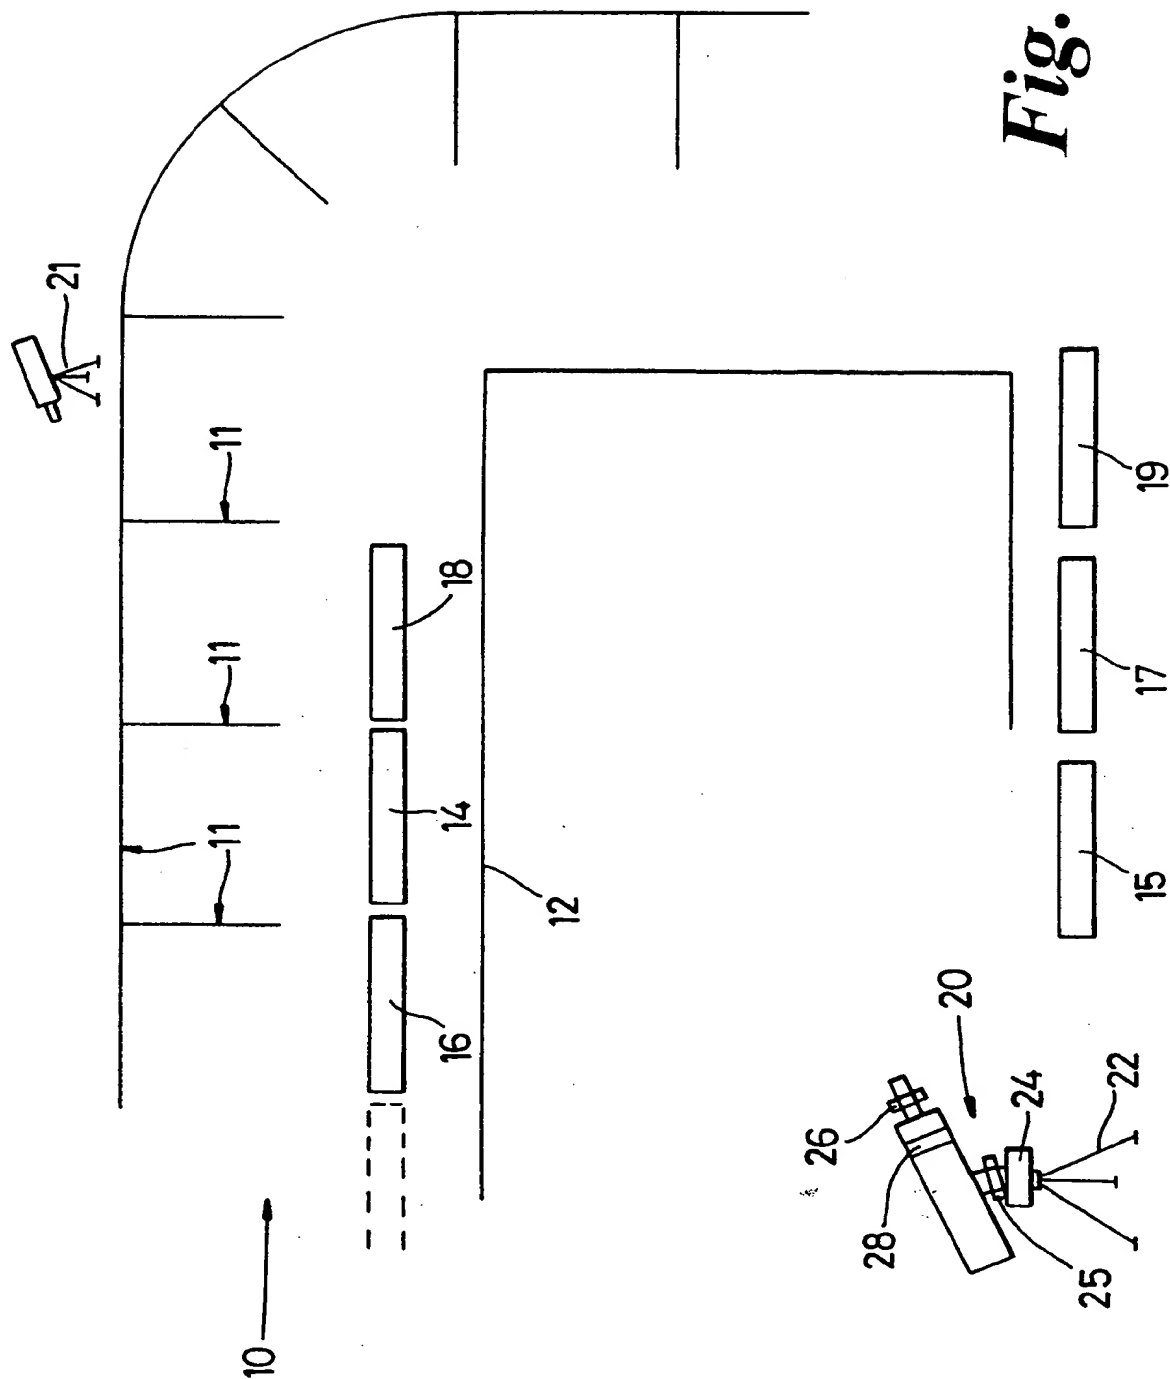
 v. substitution of a plurality of billboards selected locally at said receiver into the specific area identified for each billboard; and

 vi. inserting occluding objects by chroma-key techniques for each billboard using a chroma-keyer in which the chroma-key colour is set
30 to detect the perfect chroma-key colour.

14. A method for electronically replacing a billboard in a video image display, generated by a camera, comprising the steps of :

- 5 a. identification of the position of a rectangular chroma-key colour billboard in a stadium or other venue, said identification step comprising specifying on the video display the chroma-key billboard to be replaced by identification of its four corners at a first camera position;
- b. storing the identification information;
- c. monitoring the movement of the camera in pan, tilt and
10 zoom;
- d. storing the monitored movement of the camera on a field by field basis; and
- e. analysing the size and position of the chroma-key billboard to be replaced from the information recorded in its first
15 known position and the stored movements of the camera to provide information relating to the size, perspective and position of the chroma-key billboard in the present video field;
- f. storing in a billboard replacement store a replacement
20 billboard to be used in replacement of the chroma-key billboard in the stadium;
- g. electronically altering the size and perspective of the replacement billboard in accordance with the camera motion information to conform to the size and perspective of the
25 chroma-key billboard to be replaced in the present video frame; and
- h. electronically replacing the chroma-key billboard in the present video frame by the replacement billboard.

1/16



SUBSTITUTE SHEET (RULE 26)

2/16

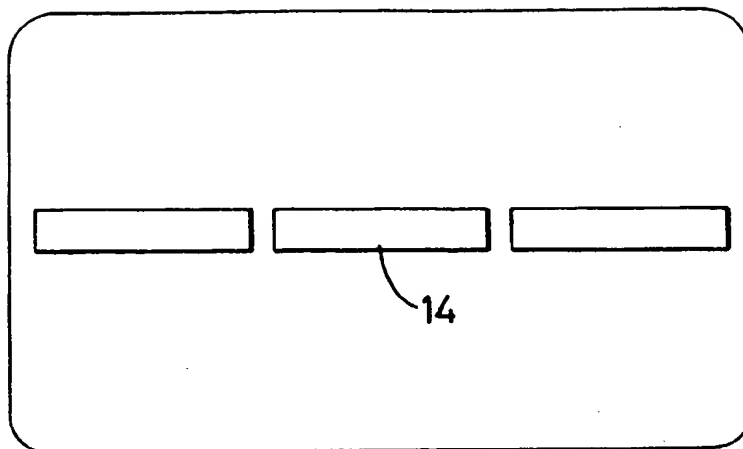


Fig. 2

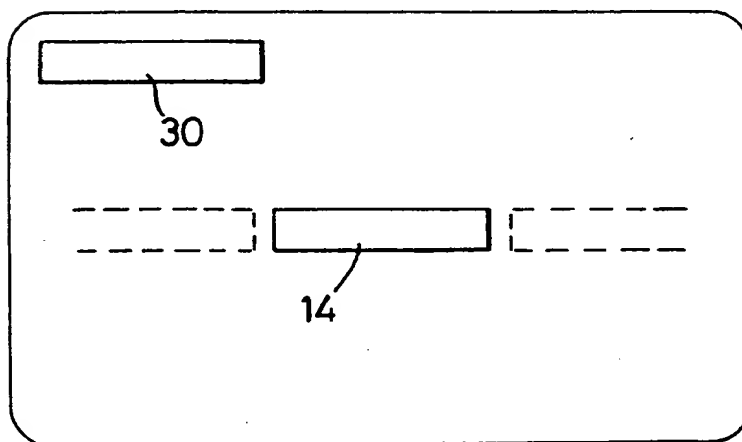


Fig. 3

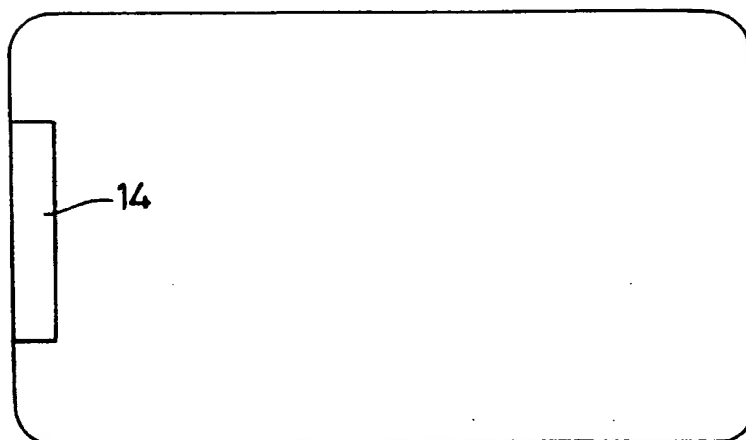
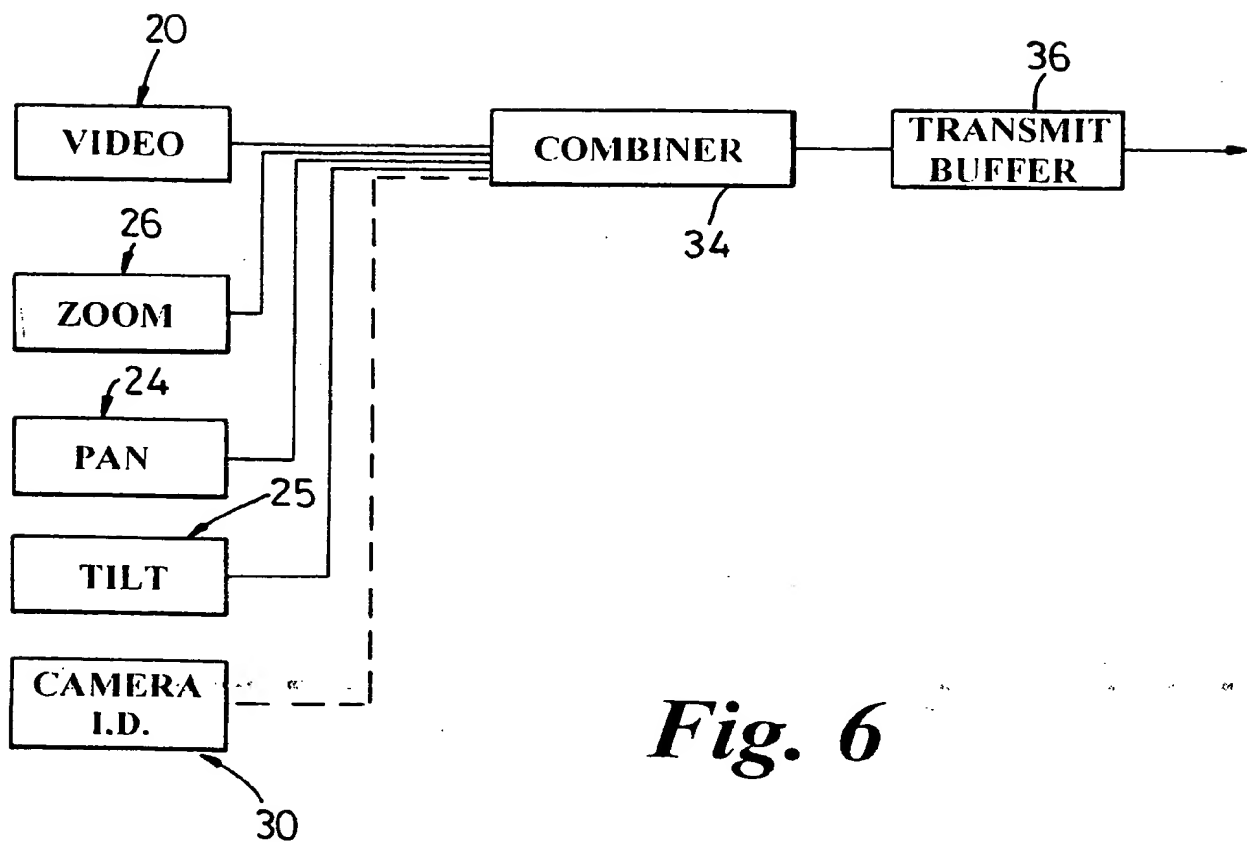


Fig. 4

SUBSTITUTE SHEET (RULE 26)

3/16

Fig. 5*Fig. 6*

SUBSTITUTE SHEET (RULE 26)

4/16

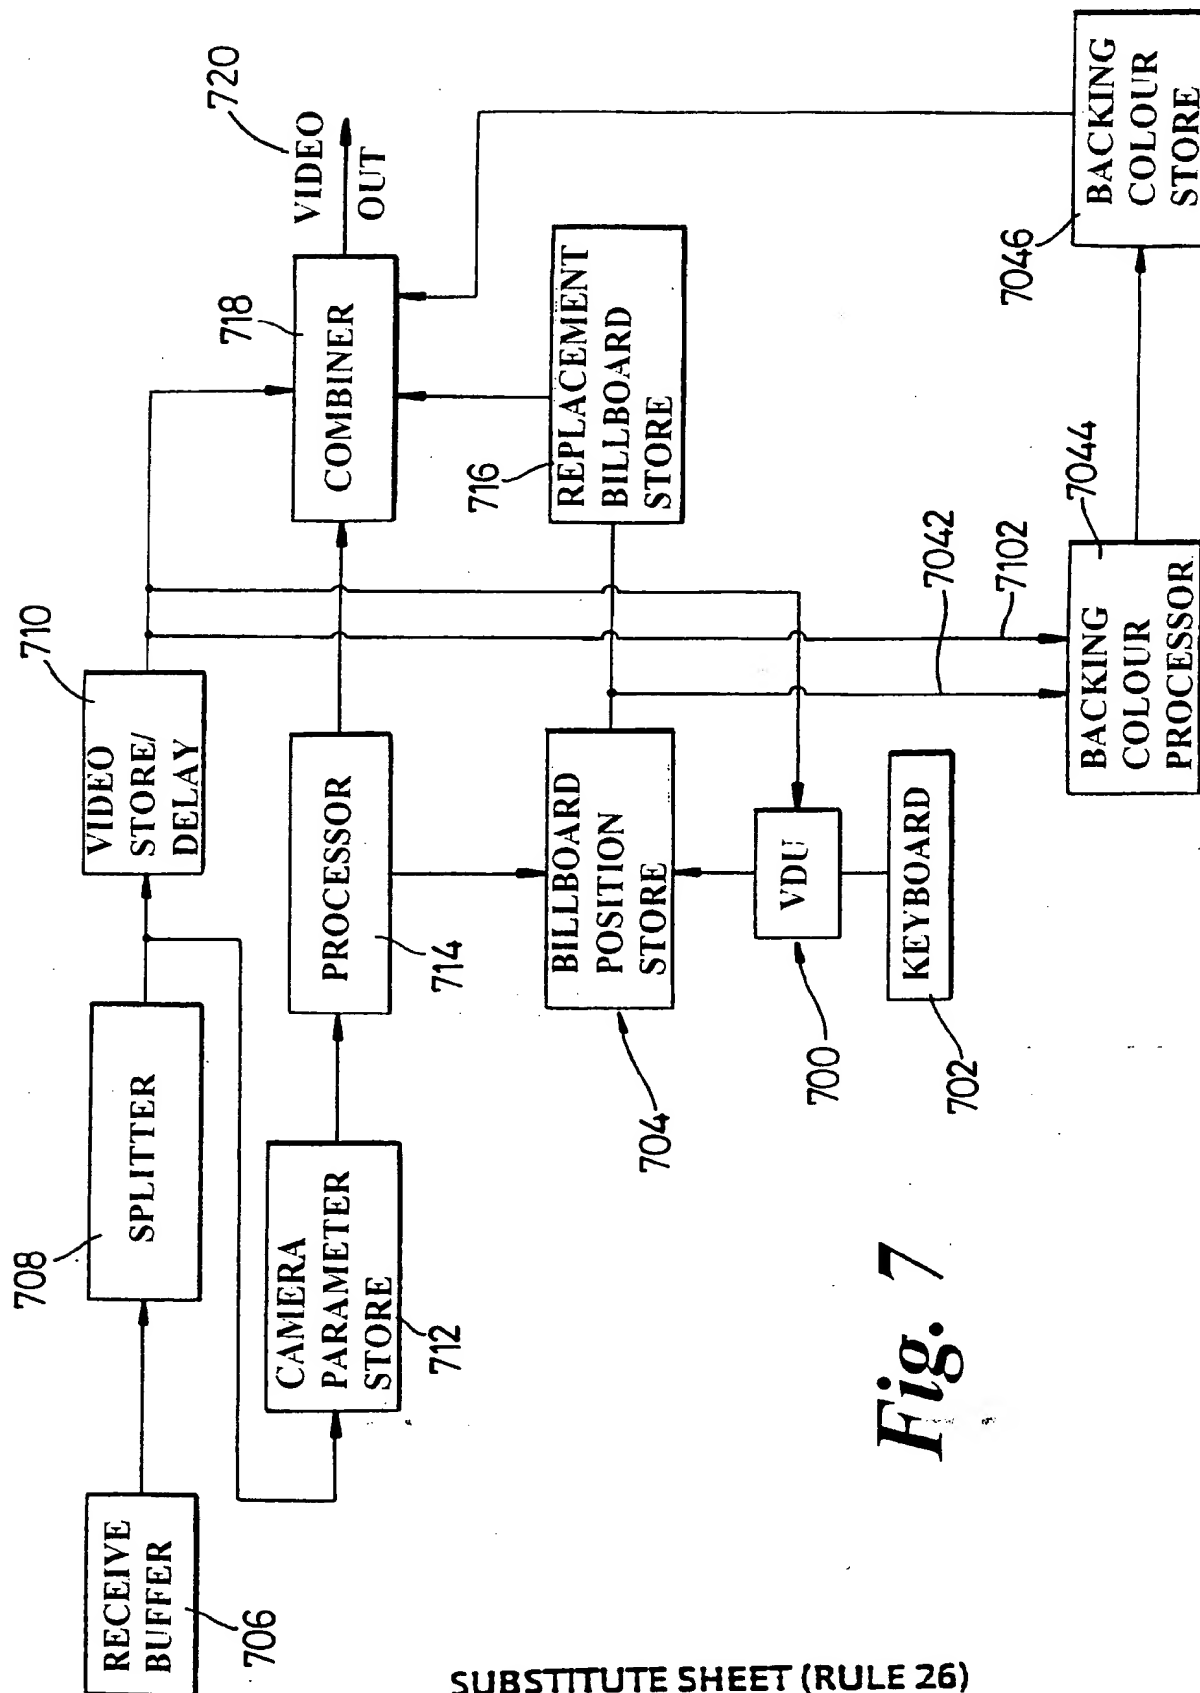
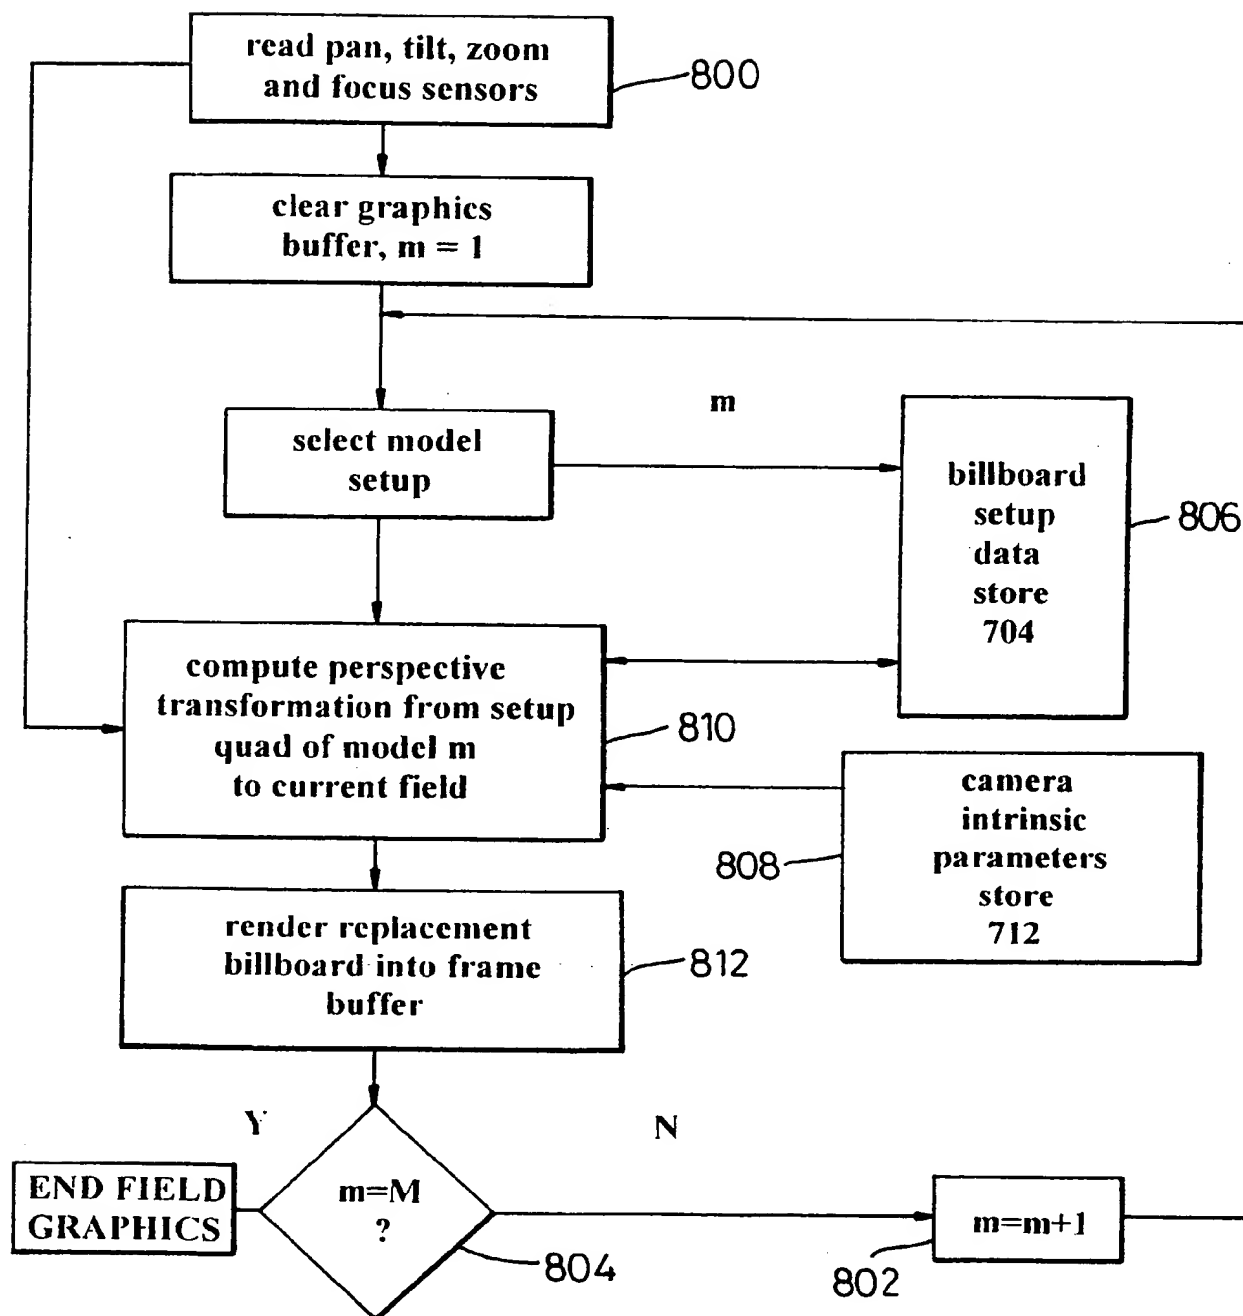


Fig. 7

SUBSTITUTE SHEET (RULE 26)

5/16

*Fig. 8*

SUBSTITUTE SHEET (RULE 26)

6/16

billboard setup data store		
static image data billboard 1	static setup data billboard 1	dynamic setup data billboard 1
906	908	910
static image data billboard M	static setup data billboard M	dynamic setup data billboard M

902

900

904

Fig. 9

billboard setup data
pan, tilt, zoom, focus (P, T, Z, F) values
billboard quadrilateral vertex coordinates Q
setup time code TC

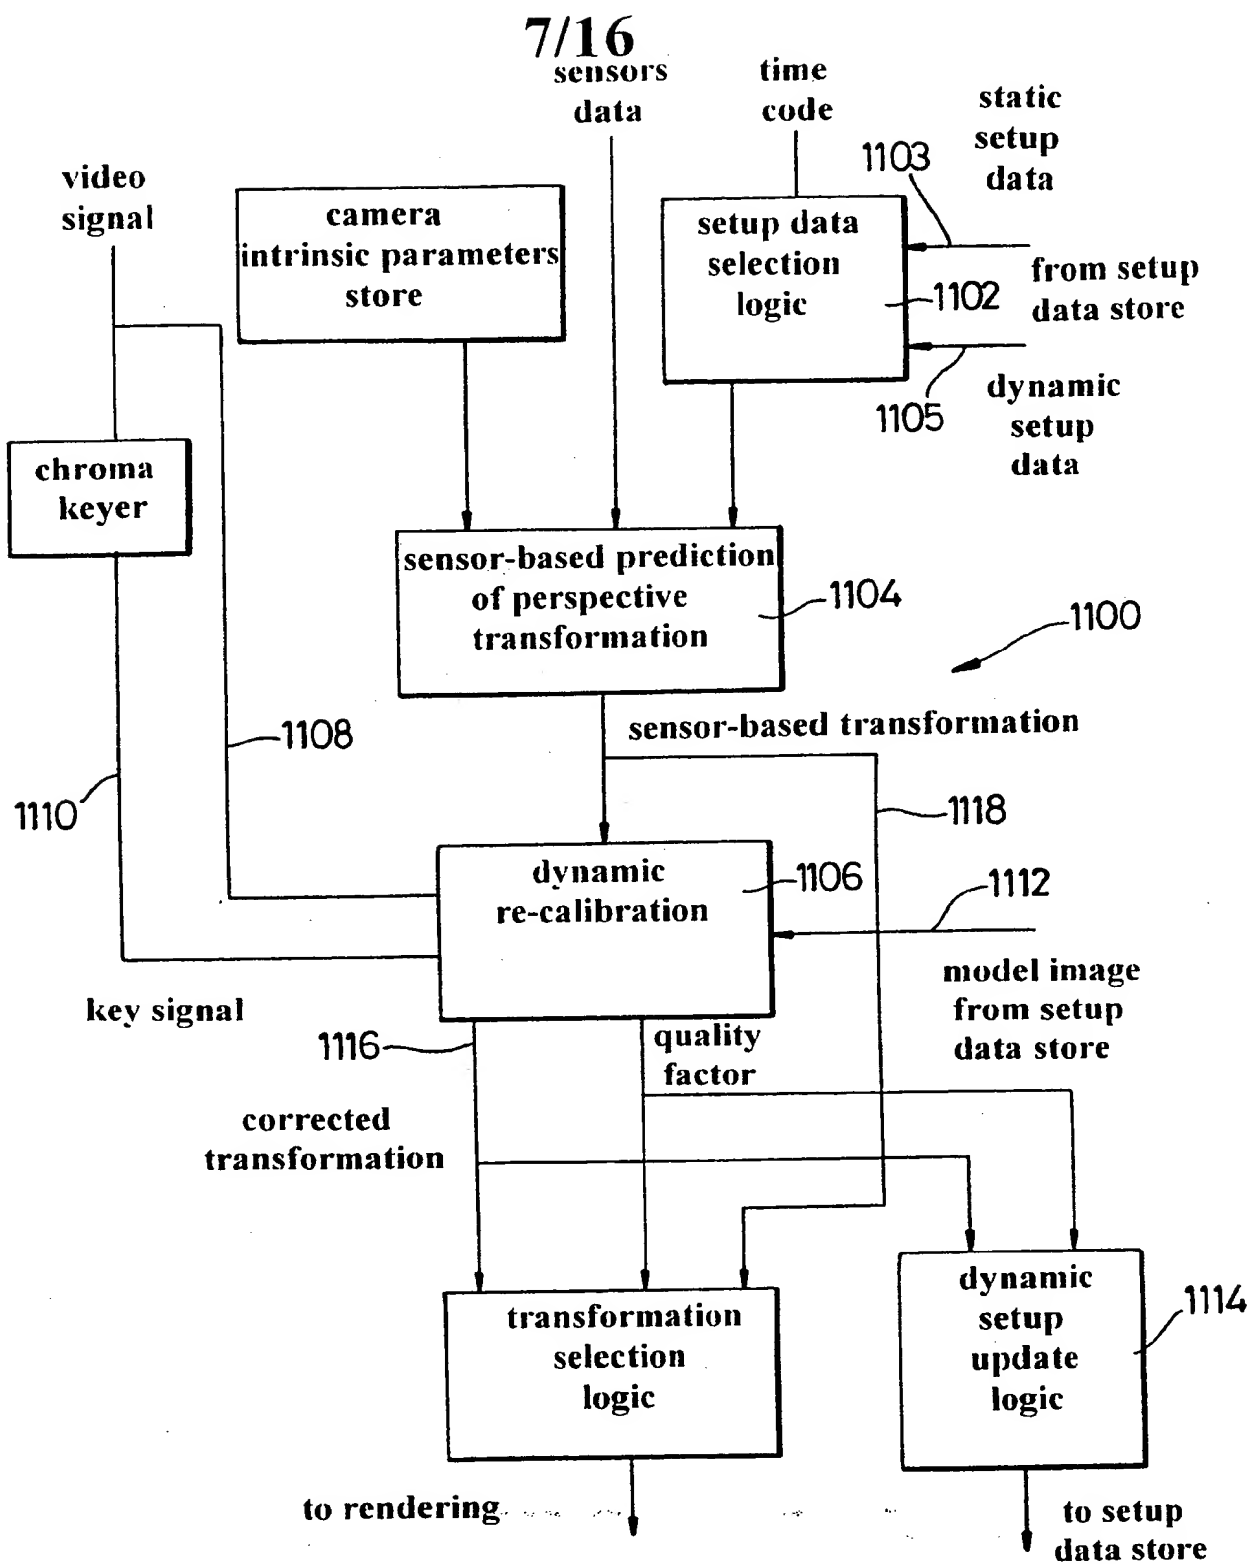
1002

1000

1004

1006

Fig. 10

**Fig. 11**

SUBSTITUTE SHEET (RULE 26)

8/16

camera intrinsic parameters store	
zoom Z1 focus F1	camera parameters record (1,1)
zoom Zm focus Fn	camera parameters record (m,n)

camera parameters record:
magnification: M_x, M_y
center: X_c, Y_c
aberrations: g_1, g_2, g_3, g_4, k_1

Fig. 12

SUBSTITUTE SHEET (RULE 26)

9/16

1. setup rotation matrix

$$R_s = \begin{bmatrix} \cos(P_s) & 0 & -\sin(P_s) \\ 0 & 1 & 0 \\ \sin(P_s) & 0 & \cos(P_s) \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos(T_s) & \sin(T_s) \\ 0 & -\sin(T_s) & \cos(T_s) \end{bmatrix}$$

600

2. prediction rotation matrix

$$R_p = \begin{bmatrix} \cos(P_p) & 0 & -\sin(P_p) \\ 0 & 1 & 0 \\ \sin(P_p) & 0 & \cos(P_p) \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos(T_p) & \sin(T_p) \\ 0 & -\sin(T_p) & \cos(T_p) \end{bmatrix}$$

602

3. setup to prediction perspective transformation

$$R_{sp} = R_s^{-1} R_p$$

604

4. setup to prediction point transformation

$$u_p = \frac{R_{sp}[0][0]u_s + R_{sp}[1][0]v_s + R_{sp}[2][0]}{R_{sp}[0][2]u_s + R_{sp}[1][2]v_s + R_{sp}[2][2]}$$

$$v_p = \frac{R_{sp}[0][1]u_s + R_{sp}[1][1]v_s + R_{sp}[2][1]}{R_{sp}[0][2]u_s + R_{sp}[1][2]v_s + R_{sp}[2][2]}$$

606

5. image plane to frame-buffer

$$x = (u - A_u(u,v)) M_X + X_C$$

$$y = (v - A_v(u,v)) M_Y + Y_C$$

608

Fig. 13

6. aberrations

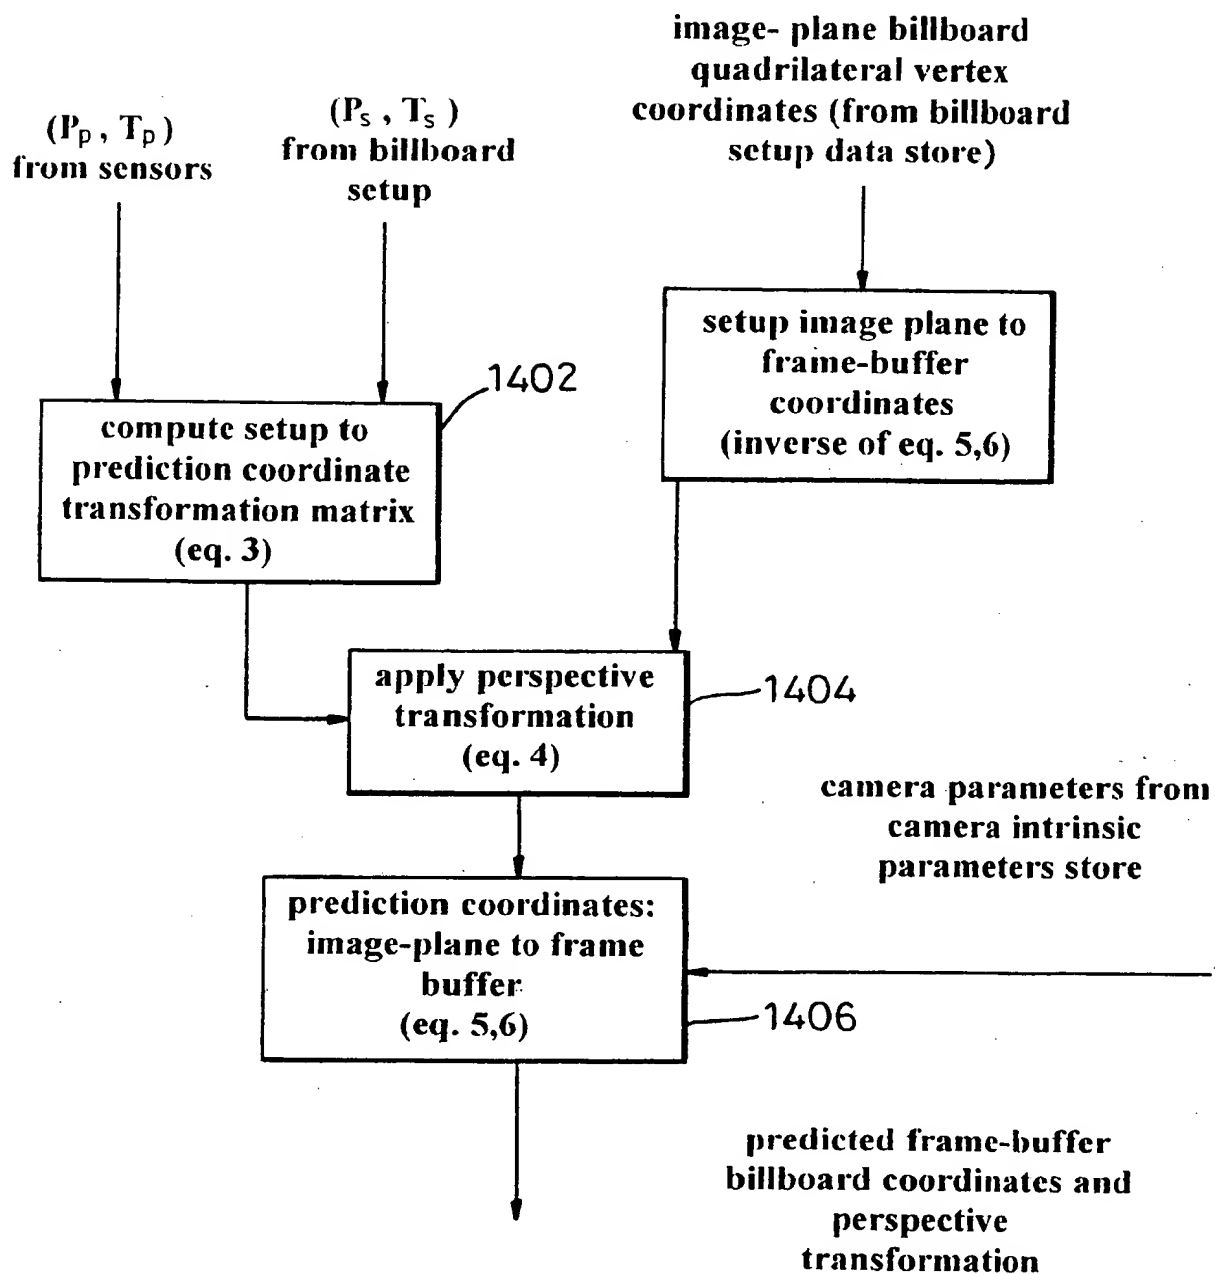
$$A_u(u,v) = (g_1 + g_3)u^2 + g_4 uv + g_1 v^2 + k_1 u(u^2 + v^2)$$

$$A_v(u,v) = g_2 u^2 + g_3 uv + (g_2 + g_4)v^2 + k_1 v(u^2 + v^2)$$

610

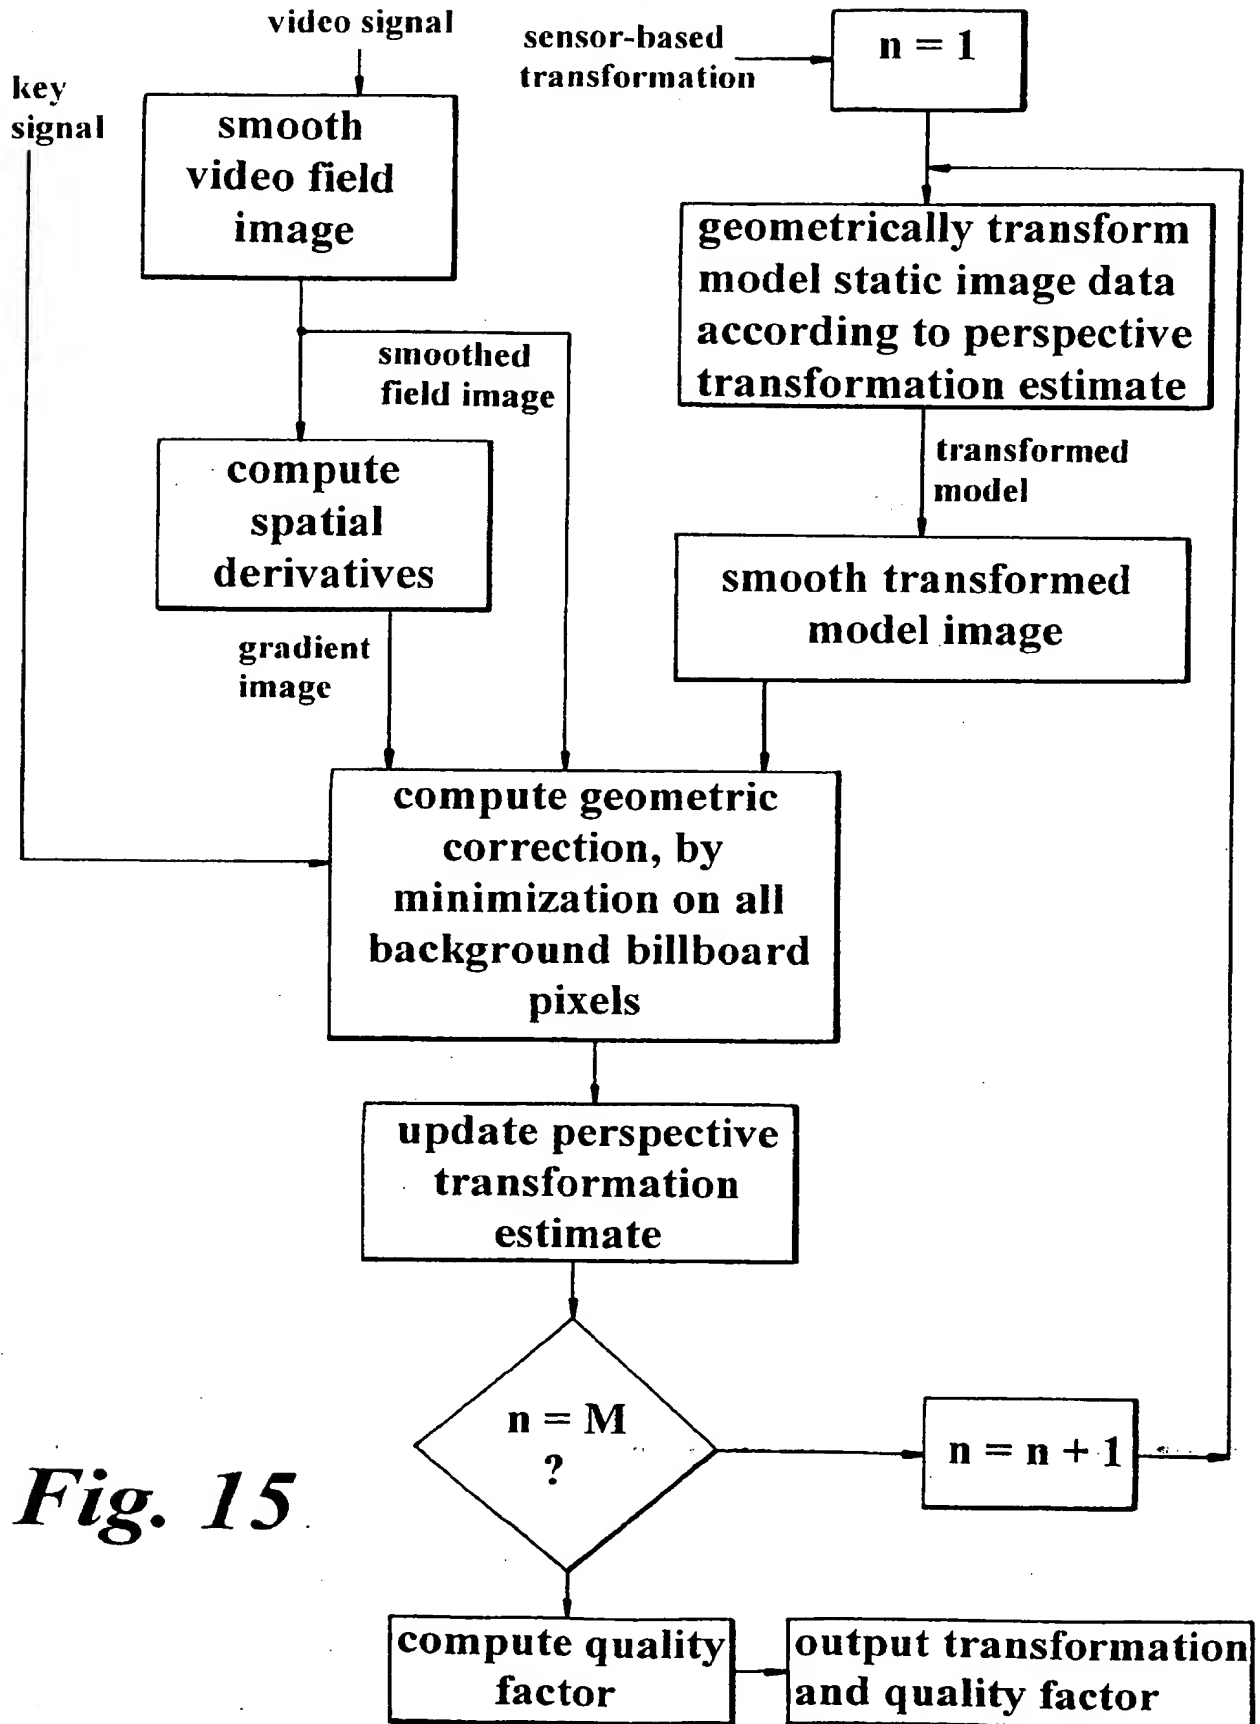
SUBSTITUTE SHEET (RULE 26)

10/16

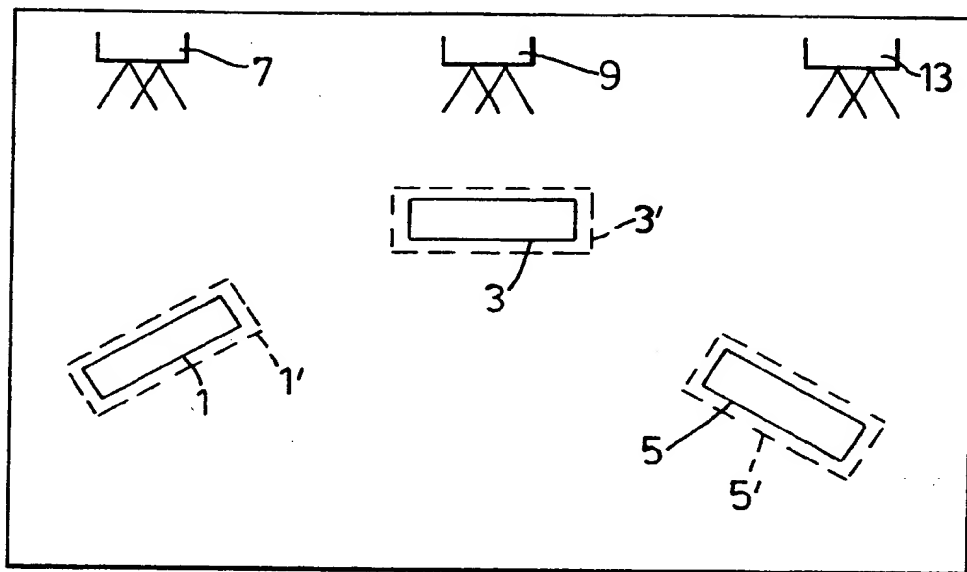
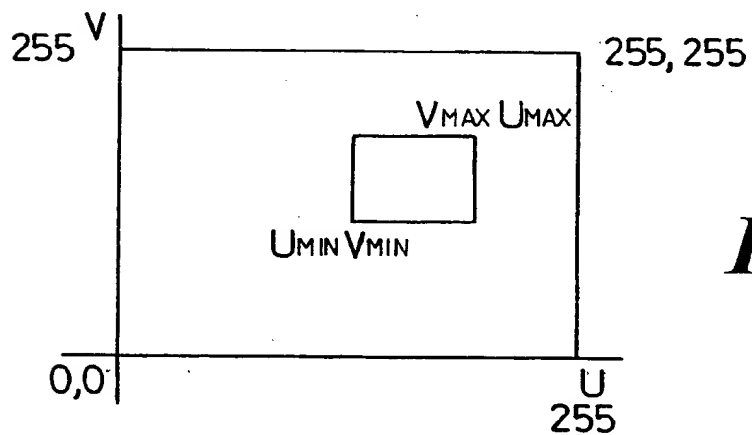
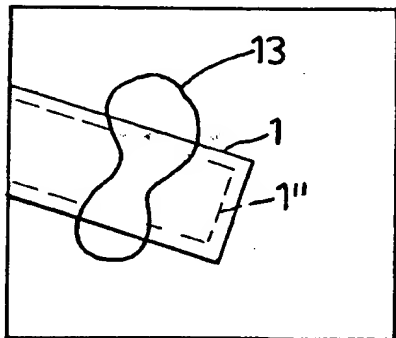
*Fig. 14*

SUBSTITUTE SHEET (RULE 26)

11/16

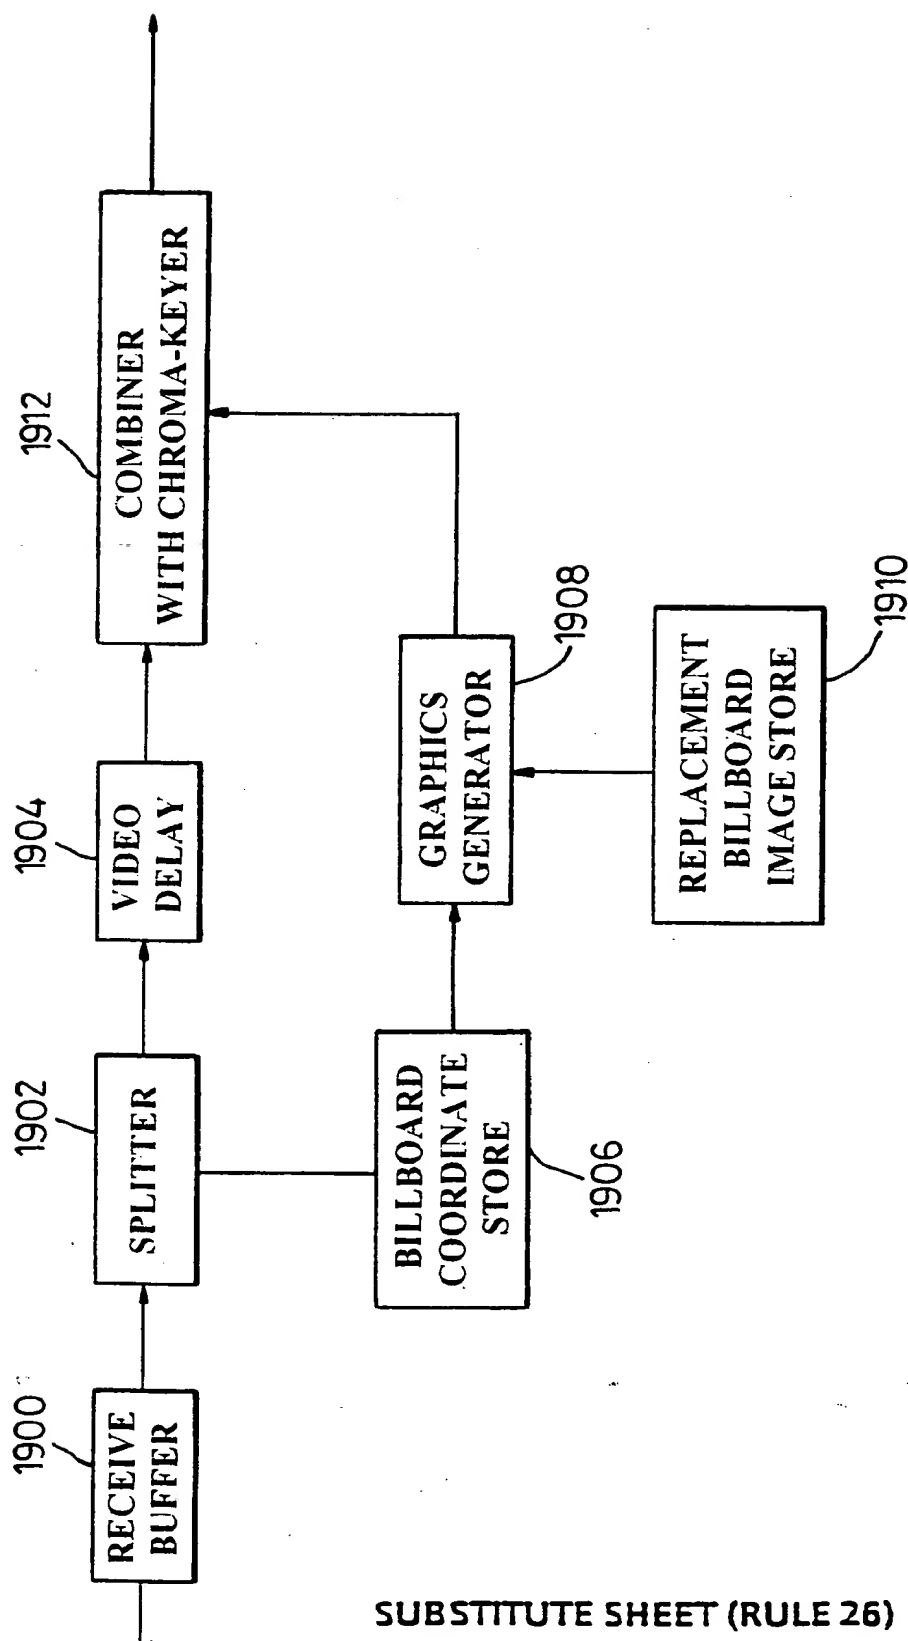
*Fig. 15*

12/16

**Fig. 16****Fig. 17****Fig. 18**

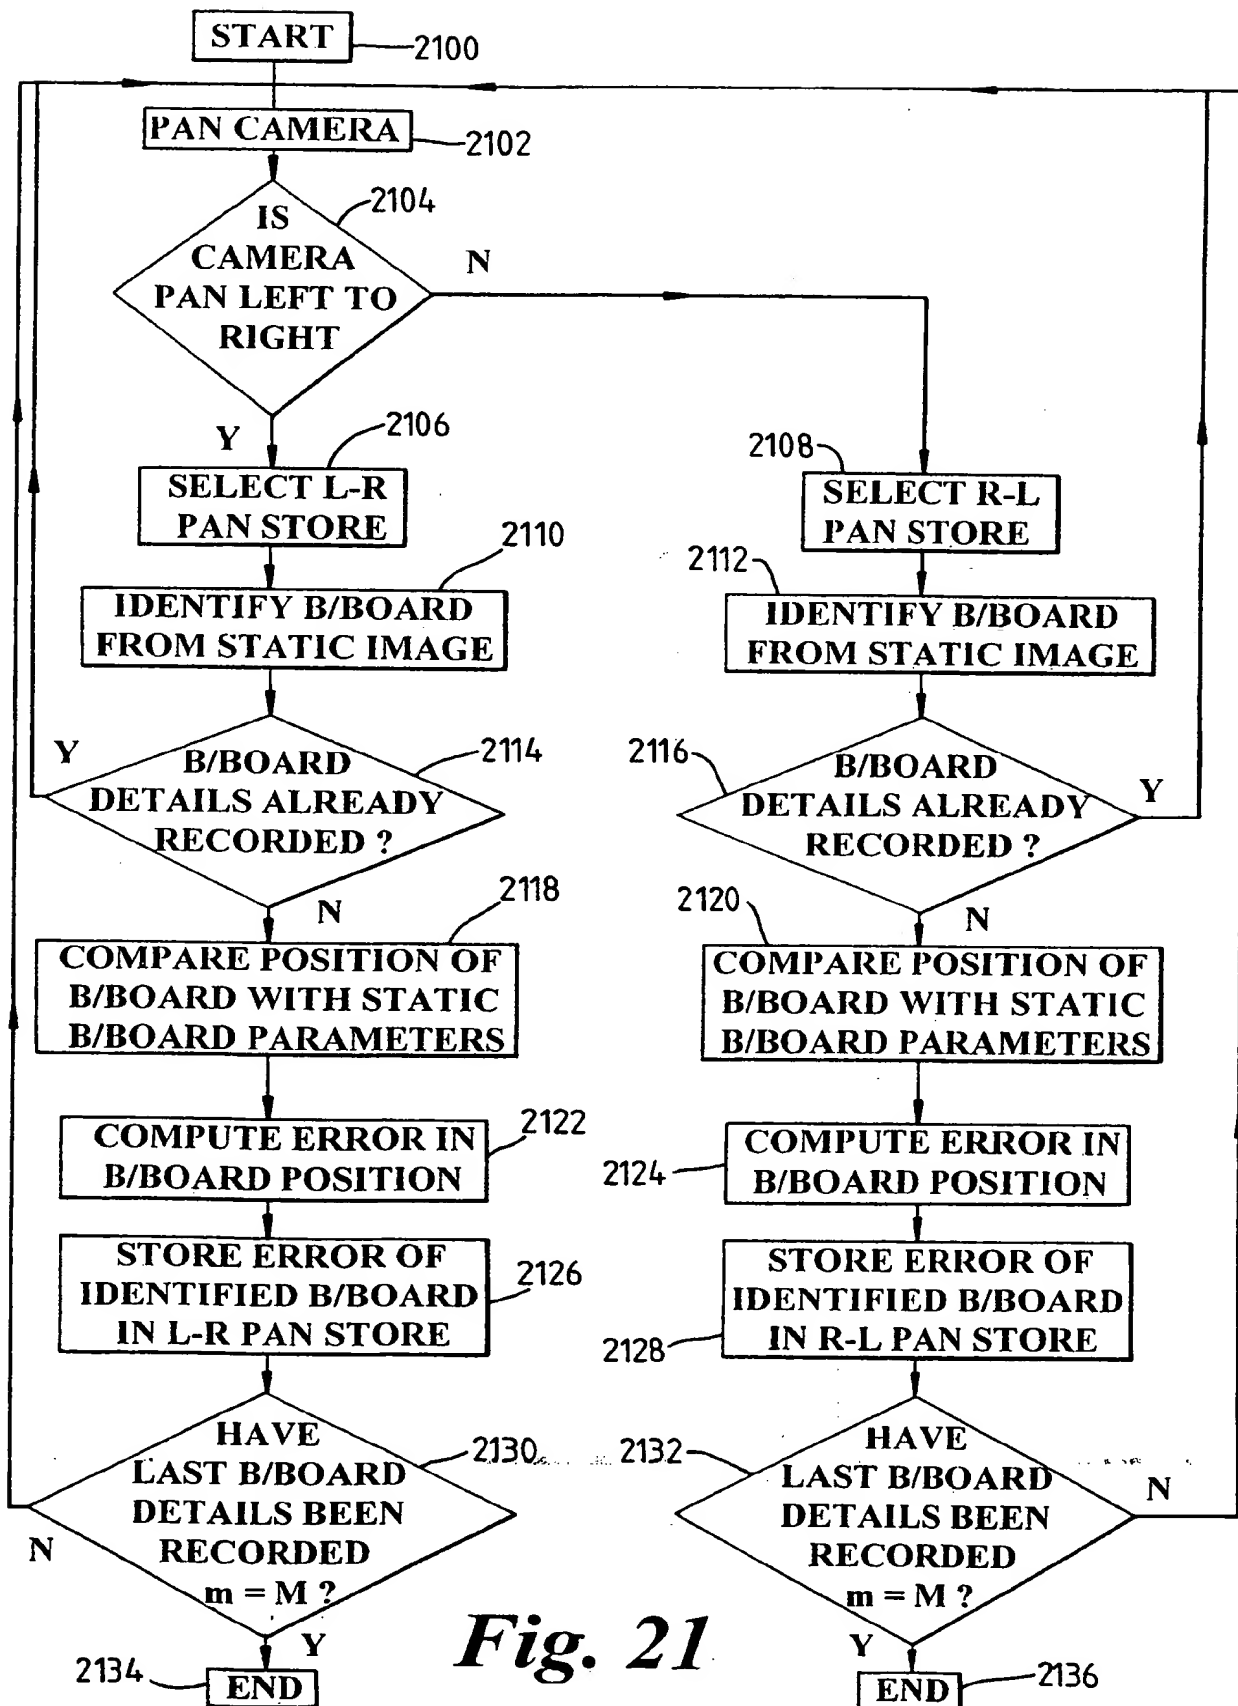
SUBSTITUTE SHEET (RULE 26)

13/16

*Fig. 19*

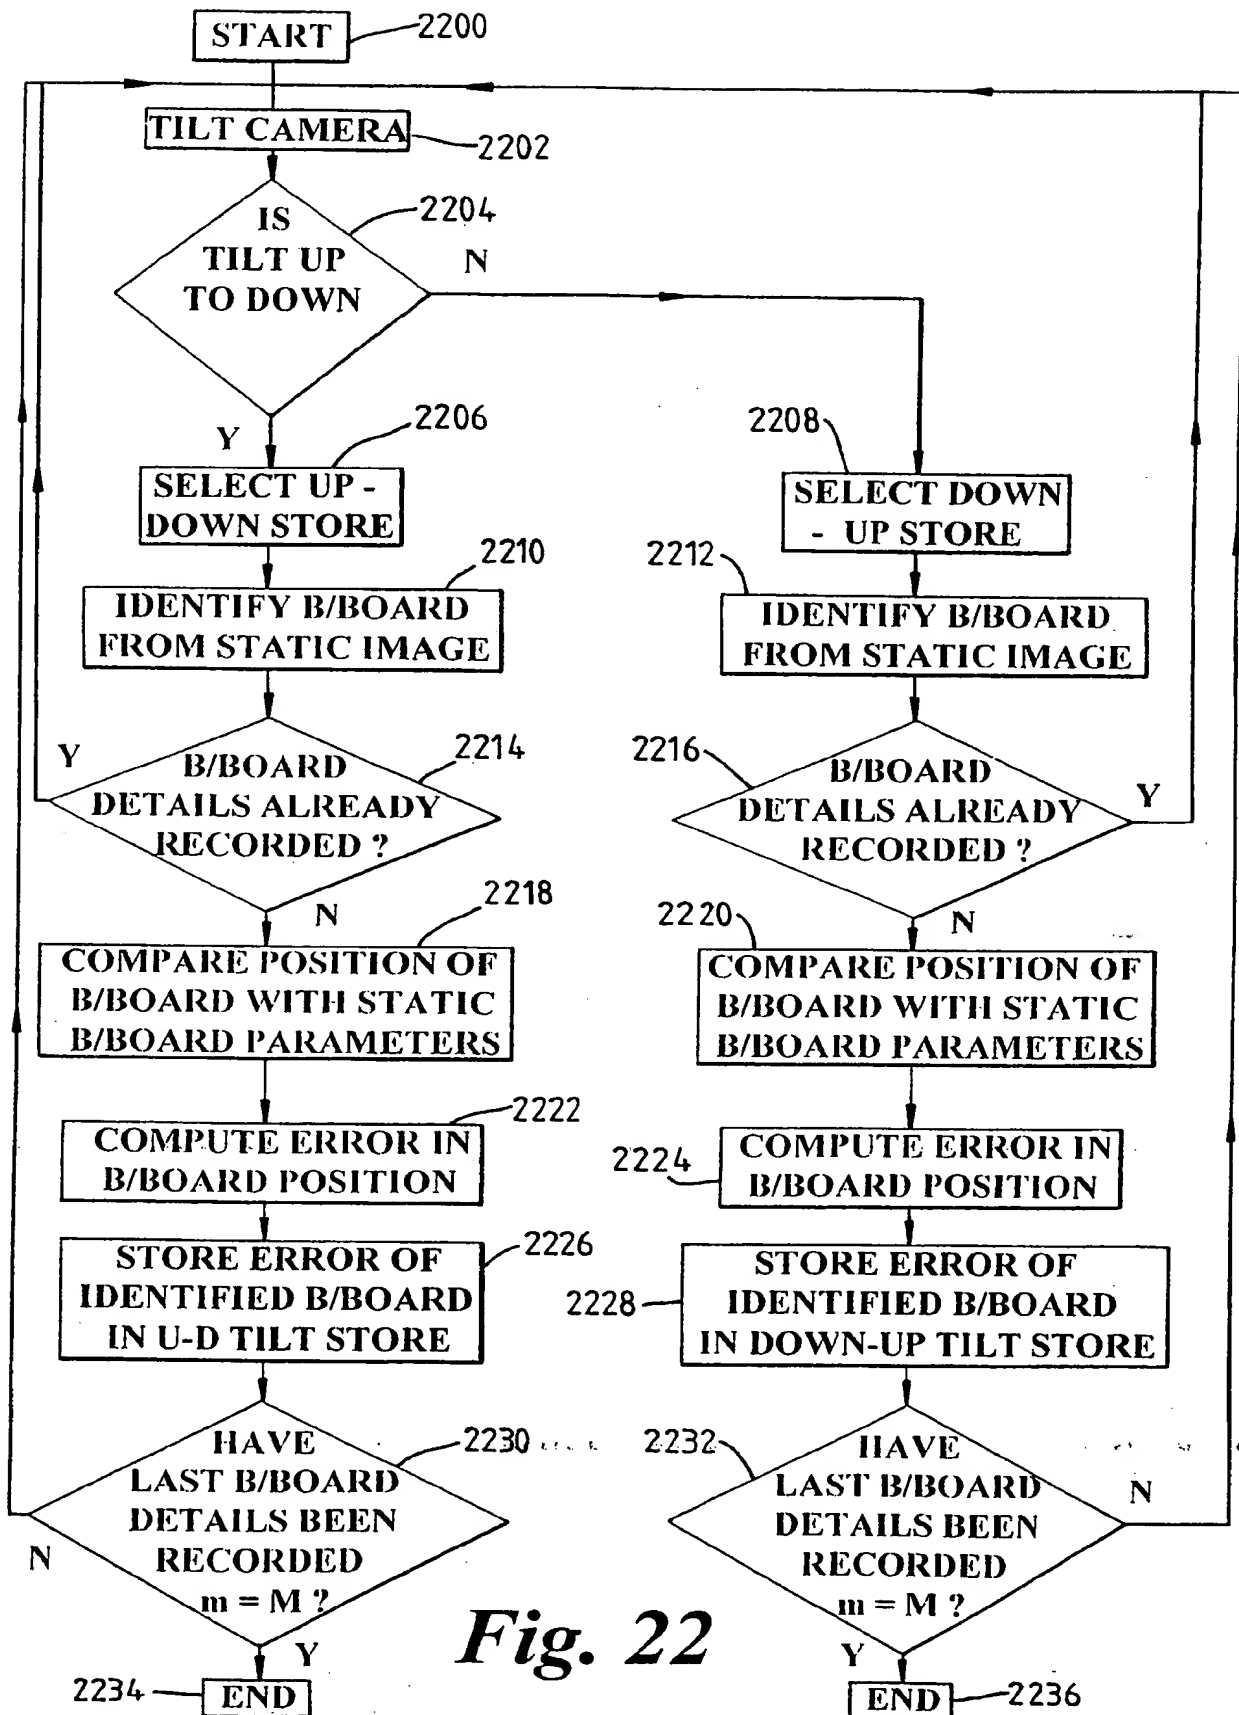
SUBSTITUTE SHEET (RULE 26)

15/16

*Fig. 21*

SUBSTITUTE SHEET (RULE 26)

16/16

*Fig. 22*

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 96/02224

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N5/272 H04N9/75 H04N5/262

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,93 06691 (SARNOFF DAVID RES CENTER) 1 April 1993 see page 7, line 34 - page 21, line 2; figures 4-7	1-4,6-14
X	US,A,5 353 392 (LUQUET ANDRE ET AL) 4 October 1994 cited in the application see column 1, line 1 - column 3, line 23 see column 6, line 7 - column 7, line 36; figures 2,4C	1-4,6-14
X	WO,A,93 02524 (PRINCETON ELECTRONIC BILLBOARD) 4 February 1993 see page 9, line 30 - page 20, line 2; figure 1	1,2,4, 6-11,13, 14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "Z" document member of the same patent family

Date of the actual completion of the international search

11 December 1996

Date of mailing of the international search report

13.01.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

De Paepe, W

INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/GB 96/02224

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO,A,94 05118 (BRITISH BROADCASTING CORP ;GRAHAM ALEXANDER THOMAS (GB)) 3 March 1994 see page 1, line 18 - page 2, line 23 see page 4, line 4 - page 5, line 27 see page 11, line 26 - page 13, line 18; figures 1,4 ---	1,2,4, 6-9 3,5, 10-14
X A	US,A,4 393 394 (MCCOY REGINALD F H) 12 July 1983 see column 3, line 1 - column 5, line 57; figure 1 ---	1,2,4, 6-9 5,10,11, 13,14
P,X	US,A,5 491 517 (KREITMAN HAIM ET AL) 13 February 1996 see column 1, line 60 - column 3, line 43 see column 6, line 38 - column 8, line 42; figures 1,2,5-8 see column 12, line 59 - column 14, line 26; figures 18-22 ---	1-14
P,X	WO,A,95 30312 (ORAD INC ;TAMIR MICHAEL (IL); SHARIR AVI (IL)) 9 November 1995 see page 3, line 1 - page 6, line 9 see page 9, line 1 - page 17, line 24; figures 1,2 see page 18, line 20 - page 20, line 12; figures 5-10 ---	1-4,6-14
P,X	US,A,5 488 675 (HANNA KEITH J) 30 January 1996 see column 2, line 40 - column 4, line 5; figure 1 see column 4, line 37 - column 6, line 41; figures 3A,3B,3C ---	1,2, 4-11,13, 14
A	SMPTE JOURNAL, vol. 90, no. 2, February 1981, pages 107-112, XP000608888 NAKAMURA J -I ET AL: "HIGH QUALITY MONTAGE PICTURES BY A NEW COLOR KILLER SOFT CHROMAKEY SYSTEM" see page 110, column 1, line 1 - column 3, line 11; figures A,B,C,D,E,F ---	3,12
	--- -/--	

INTERNATIONAL SEARCH REPORT

Inter national Application No
PC1/GB 96/02224

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	<p>FERNSEH UND KINOTECHNIK, vol. 50, no. 1, 1 January 1996, pages 11-16, 18 - 22, XP000555564 SOMMERHAUSER F: "DAS VIRTUELLE STUDIO GRUNDLAGEN EINER NEUEN STUDIOPRODUKTIONSTECHNIK" see page 13, column 2, line 1 - column 3, line 5; figure 2 see page 14, column 1, line 23 - page 18, column 2, line 33; figures 5,10 see page 19, column 1, line 10 - page 20, column 2, line 26; figure 16 -----</p>	<p>1,2, 4-11,13, 14</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 96/02224

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9306691	01-04-93	AU-B- 663731	19-10-95
		AU-A- 2672092	27-04-93
		CA-A- 2119272	01-04-93
		EP-A- 0604572	06-07-94
		JP-T- 6510893	01-12-94
		US-A- 5566251	15-10-96

US-A-5353392	04-10-94	FR-A- 2661061	18-10-91
		DE-D- 69107267	23-03-95
		DE-T- 69107267	08-06-95
		EP-A- 0477351	01-04-92
		ES-T- 2068581	16-04-95
		WO-A- 9115921	17-10-91
		HK-A- 165895	03-11-95
		JP-T- 5501184	04-03-93
		US-A- 5515485	07-05-96

WO-A-9302524	04-02-93	EP-A- 0595808	11-05-94
		JP-T- 7502385	09-03-95

WO-A-9405118	03-03-94	EP-A- 0607406	27-07-94
		GB-A,B 2271241	06-04-94
		JP-T- 7500470	12-01-95
		US-A- 5502482	26-03-96

US-A-4393394	12-07-83	NONE	

US-A-5491517	13-02-96	AU-A- 1933495	03-10-95
		CA-A- 2179031	21-09-95
		WO-A- 9525399	21-09-95

WO-A-9530312	09-11-95	AU-A- 2430295	29-11-95

US-A-5488675	30-01-96	AU-A- 2230795	23-10-95
		EP-A- 0701721	20-03-96
		WO-A- 9527260	12-10-95

THIS PAGE BLANK (USPTO)